



ALTV2432UL Series CCTV Power Supplies

Installation Guide

Models Include:

- ***ALTV2432UL***
 - ***24VAC @ 7 amp (175VA)***
 - ***Thirty-two (32) Fuse Protected Outputs.***
- ***ALTV2432ULCB***
 - ***24VAC @ 7 amp (175VA)***
 - ***Thirty-two (32) PTC Protected Outputs.***
- ***ALTV2432300UL***
 - ***24VAC @ 12.5 amp (300VA)
or 28VAC @ 10 amp (280VA).***
 - ***Thirty-two (32) Fuse Protected Outputs.***
- ***ALTV2432300ULCB***
 - ***24VAC @ 12.5 amp (300VA)
or 28VAC @ 10 amp (280VA).***
 - ***Thirty-two (32) PTC Protected Outputs.***
- ***ALTV2432600UL***
 - ***24VAC @ 25 amp (600VA)
or 28VAC @ 20 amp (560VA).***
 - ***Thirty-two (32) Fuse Protected Outputs.***
- ***ALTV2432600ULCB***
 - ***24VAC @ 25 amp (600VA)
or 28VAC @ 20 amp (560VA).***
 - ***Thirty-two (32) PTC Protected Outputs.***



Overview:

These Altronix CCTV Power Supplies provide 24VAC/28VAC, (ALTV2432UL and ALTV2432ULCB provide 24VAC), distributed via thirty-two (32) fuse or PTC protected outputs for powering CCTV Cameras, heaters and other video accessories.

Thirty-two (32) Output ALTV2432UL Reference Chart:

Altronix Model Number	Output Voltage	Total Output Current (Power)	Number of Outputs	PTC Protected Outputs (Class 2 power limited)	Fuse Protected Outputs	Output Current (max per output)	Main Fuse Ratings	115VAC 50/60Hz Input Current
ALTV2432UL	24VAC	7 amp	32	-	x	3.5 amp	3.5 amp 250V	2.9 amp
ALTV2432ULCB	24VAC	7 amp	32	x	-	2.5 amp	3.5 amp 250V	2.9 amp
ALTV2432300UL	24VAC	12.5 amp	32	-	x	3.5 amp	-	2.7 amp
	28VAC	10 amp						
ALTV2432300ULCB	24VAC	12.5 amp	32	x	-	2.5 amp	-	2.7 amp
	28VAC	10 amp						
ALTV2432600UL	24VAC	25 amp	32	-	x	3.5 amp	-	5.4 amp
	28VAC	20 amp						
ALTV2432600ULCB	24VAC	25 amp	32	x	-	2.5 amp	-	5.4 amp
	28VAC	20 amp						

Specifications:

- UL Listed for Commercial CCTV Equipment (UL2044). CUL Listed - CSA Standard C22.2 No.1-98, Audio, Video and Similar Equipment.
- Surge suppression.
- AC power LED indicator.
- Power ON/OFF switch / circuit-breaker.
- Unit maintains camera synchronization.
- Ease of installation saves time & eliminates costly labor.
- Spare fuses included (on fuse protected models).

Enclosure Dimensions:

13"H x 13.5"W x 3.5"D

Installation Instructions:

1. Mount unit in desired location.
2. Turn OFF main switch on unit. (Figs. 1-3, pgs. 4-6).
3. All units are factory set for 24VAC operation.
For 28VAC operation (where available) adjust unit prior to mounting and applying power as follows: Change the wire position so that the black wire [28V] is connected to the terminal marked [P] and the yellow wire [24V] is connected to the terminal marked [S].
4. Connect AC power to the black and white flying leads of the transformer(s) (Figs. 1-3, pgs. 4-6), secure green lead to earth ground. Use 18 AWG or larger for all power connections.
Keep power limited (PTC protected outputs only) wiring separate from non-power limited wiring. Minimum .25" spacing must be provided. Use separate knockouts.
5. Measure output voltage before connecting devices. This helps avoid potential damage.
CAUTION: Determine the maximum operating voltage of the equipment being powered before adjusting the output voltage.
6. Connect devices to terminals marked [1P - 1N through 16P - 16N] on PD16W/PD16WCB board (Figs. 1-3, pgs. 4-6), carefully observing polarity. Terminals marked [1P - 16P] are of the same polarity.

- 7. Turn main switch on unit to the ON (RESET) position (*Figs. 1-3, pgs. 4-6*).
- 8. Green LED(s) will illuminate when unit is powered.
- 9. Upon completion of wiring, secure enclosure door with screws (supplied).

**Caution: Equipment to be installed / serviced by authorized / trained personnel only.
Shut branch circuit power before installing / servicing equipment.**

WARNING: To reduce the risk of fire or electric shock, do not expose the unit to rain or moisture. This installation should be made by qualified service personnel and should conform to all local codes and in accordance with the National Electrical Code. Use 75 C or higher rated UL insulated wiring for connecting the unit to the mains. Replace fuses only with the same type and rating (3.5 amp/250V).

Terminal Identification:

PD16W - Power Distribution Module

1P - 16P	AC output.
1N - 16N	AC output.



The lightning flash with arrow head symbol within an equilateral triangle is intended to alert the user to the presence of an insulated “DANGEROUS VOLTAGE” within the products enclosure that may be of sufficient magnitude to constitute an electric shock.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.



CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN



CAUTION: To reduce the risk of electric shock do not open enclosure. There are no user serviceable parts inside. Refer servicing to qualified service personnel.

Fig. 1
ALTV2432UL • ALTV2432ULCB

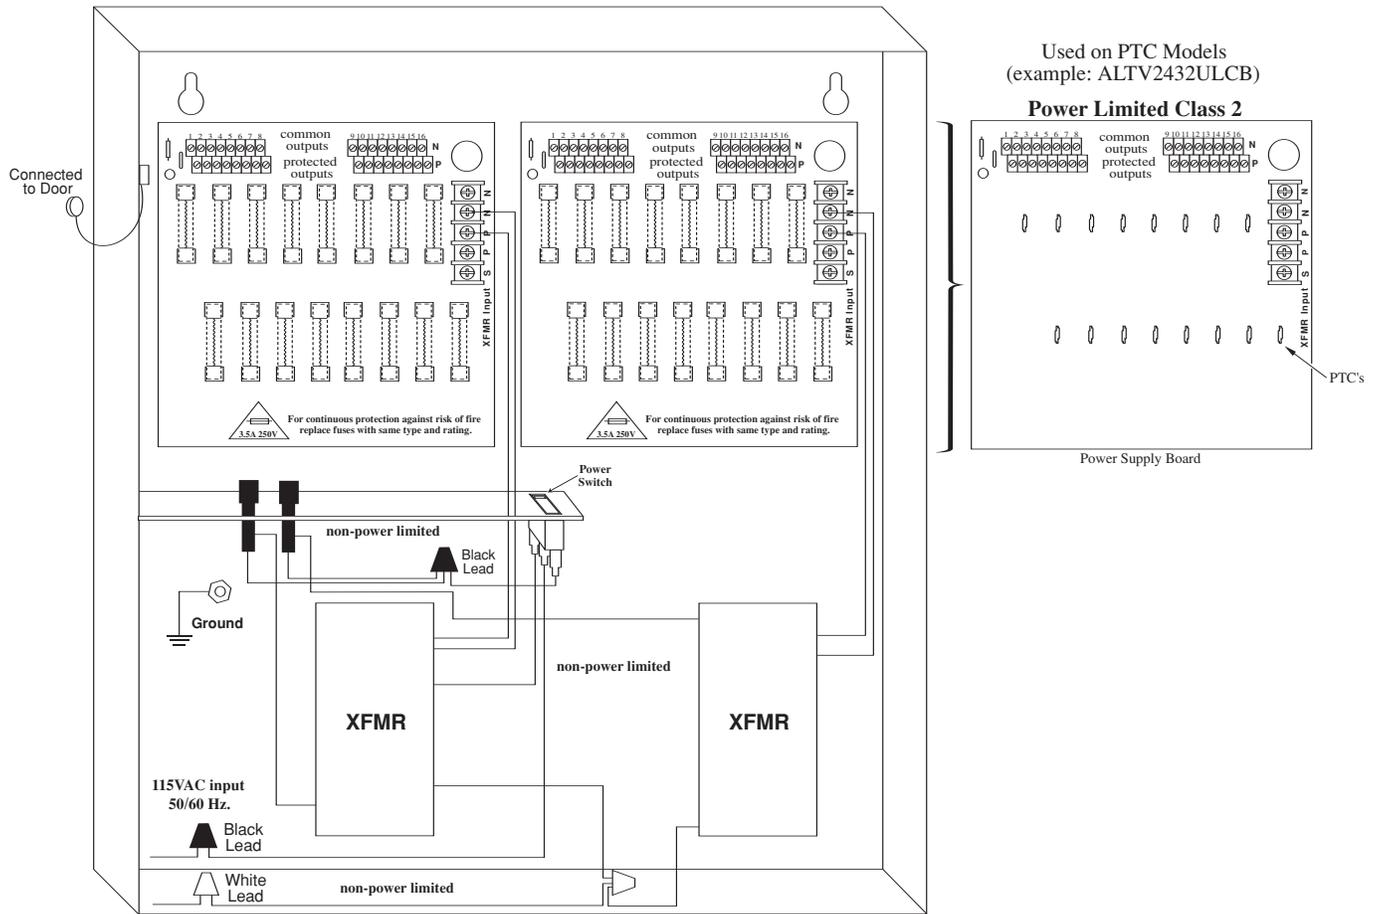


Fig. 2
ALTV2432300UL • ALTV2432300ULCB



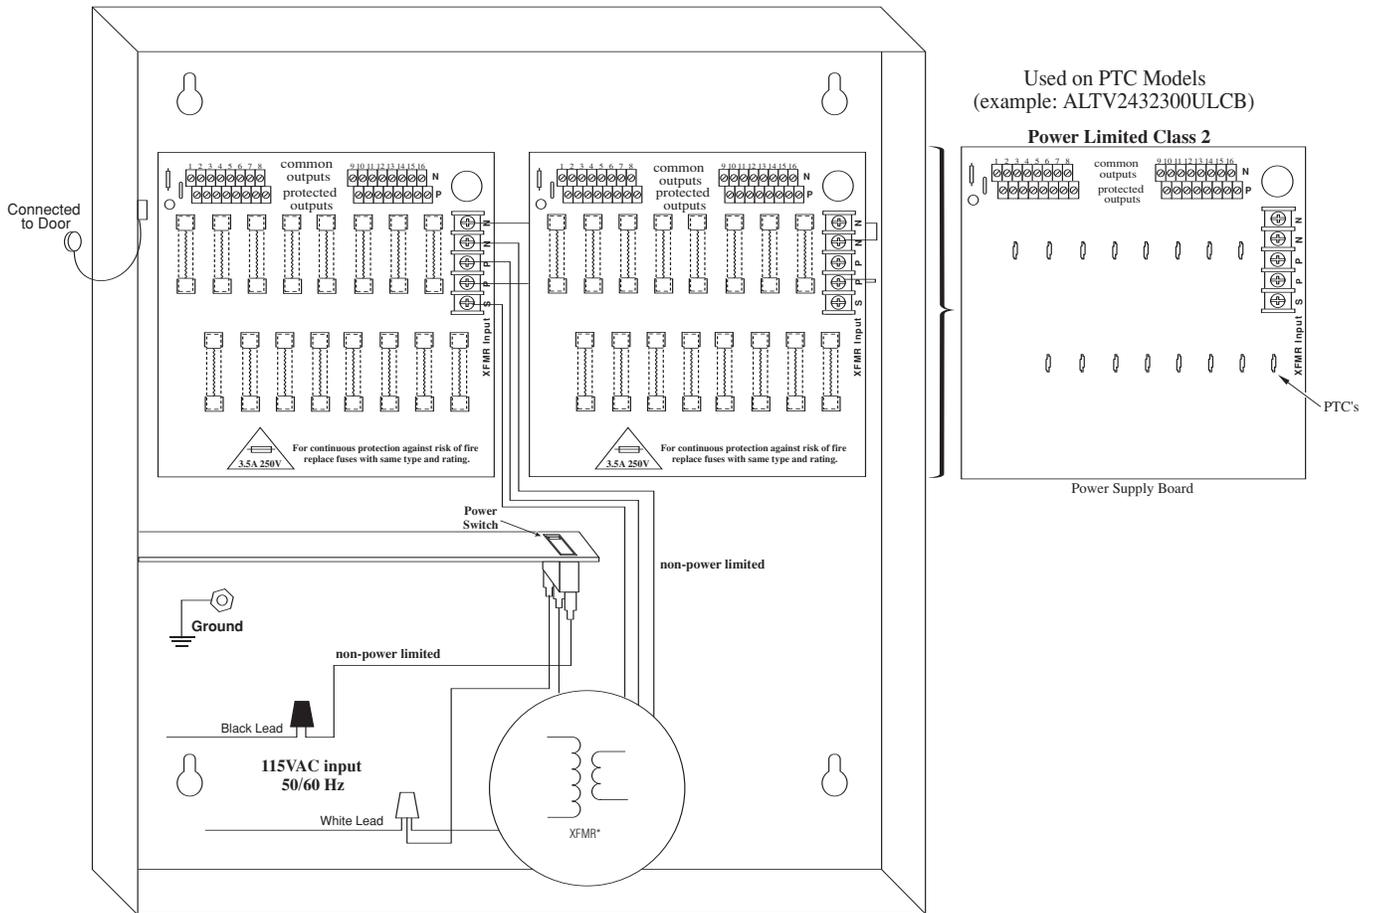


Fig. 3
ALTV2432600UL • ALTV2432600ULCB

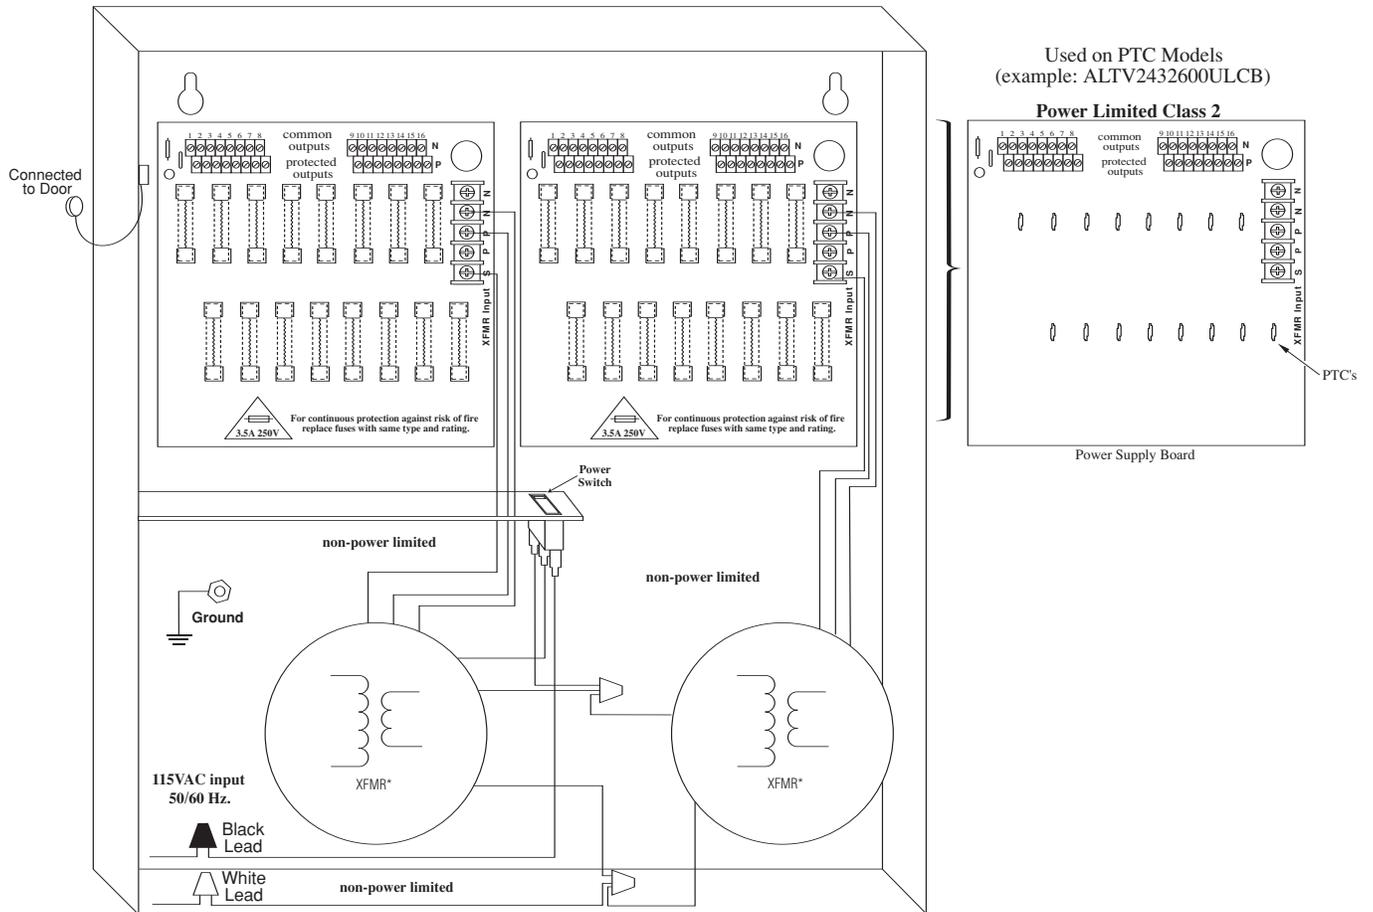

Enclosure Dimensions:

13"H x 13.5"W x 3.5"D

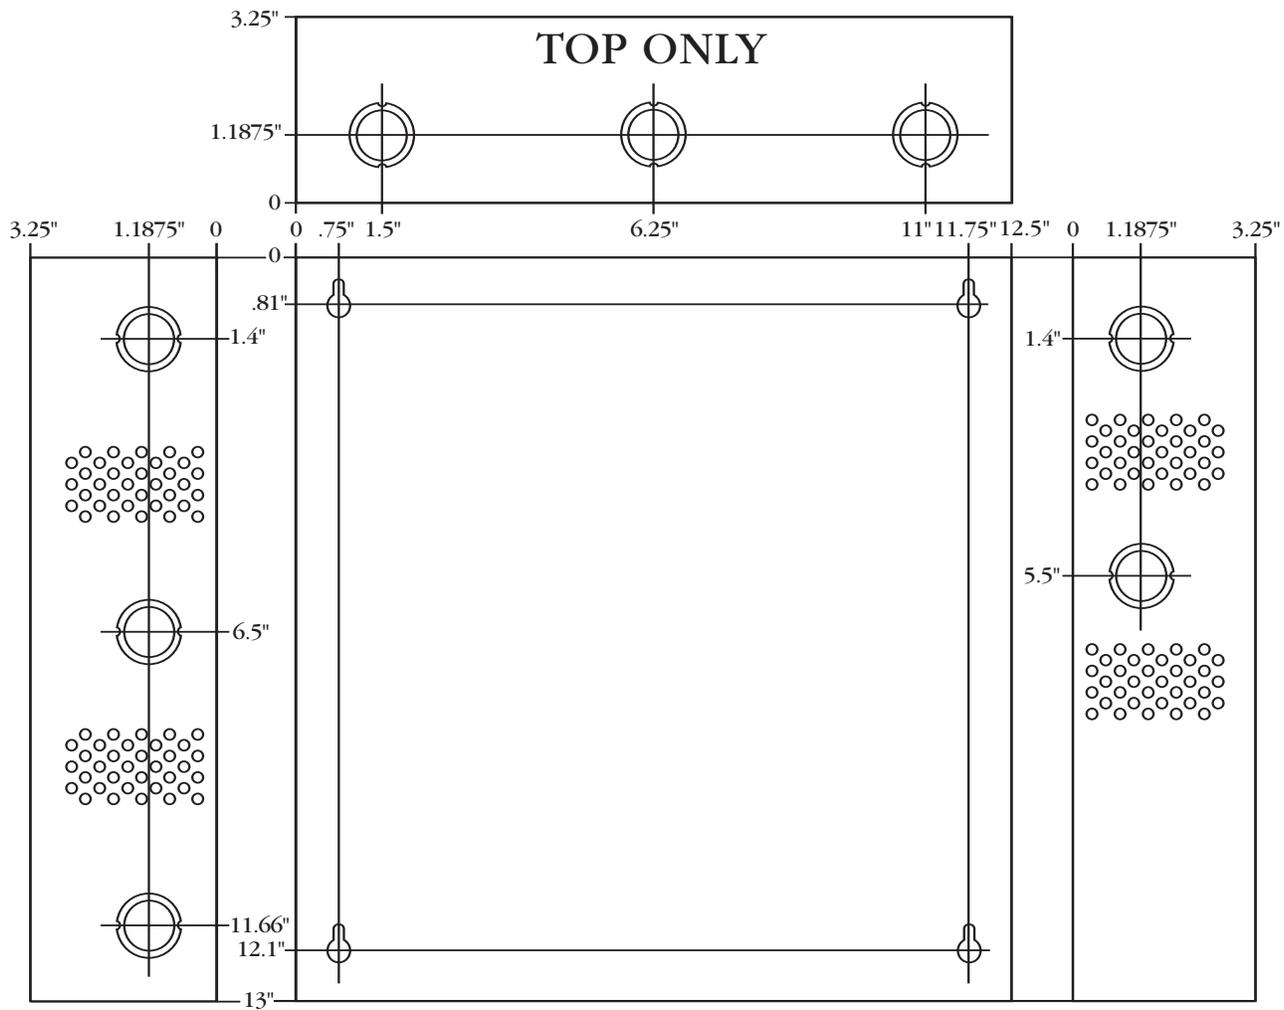

Notes:

Altronix is not responsible for any typographical errors.

Altronix Corp.
140 58th Street, Brooklyn, New York 11220 USA, 718-567-8181, fax: 718-567-9056
web site: www.altronix.com, e-mail: info@altronix.com, Lifetime Warranty, Made in U.S.A.
IIALTV2432ULSeries J21D

