



R615DC616UL, R615DC616ULCB UL Listed Rack Mount CCTV Power Supply

Rev. DSR615DC616UL - A31F

Overview



- These Altronix DC Rack Mount CCTV Power Supplies provide 6-15VDC distributed via sixteen (16) fuse or Class 2 Rated PTC protected power limited outputs for powering CCTV Cameras, heaters and other video accessories.

R615DC616UL

- Sixteen (16) fuse protected outputs.
- Outputs are rated @ 3.5 amp.

R615DC616ULCB

- Sixteen (16) Class 2 Rated PTC protected power limited outputs.
- Outputs are rated @ 2.5 amp.

Specifications

- 6-15VDC outputs.
- 6 amp supply current.
- Input 115VAC, 50/60Hz, .9 amp.
- Filtered and electronically regulated outputs.
- Short circuit and thermal overload protection.
- Illuminated power disconnect circuit breaker with manual reset.
- Removable terminal blocks w/locking screw flanges.
- 3-wire grounded line cord.
- Individual power LEDs.
- Spare fuse(s) provided (fuse protected models only).
- Unit maintains camera synchronization.
- Ease of installation saves time and eliminates costly labor.
- 2U rack mount chassis for use in standard EIA 19" rack.
- Product weight:
 - R615DC616UL: 15.6 lbs.
 - R615DC616ULCB: 15.3 lbs.
- Shipping weight:
 - R615DC616UL: 16.6 lbs.
 - R615DC616ULCB: 16.3 lbs.

Agency Approvals



UL Listed for Commercial CCTV Equipment (UL 2044).






CUL Listed - CSA Standard C22.2 No.1-98, Audio, Video and Similar Equipment.

Enclosure Dimensions

3.25"H x 19.125"W x 8.5"D

View from back

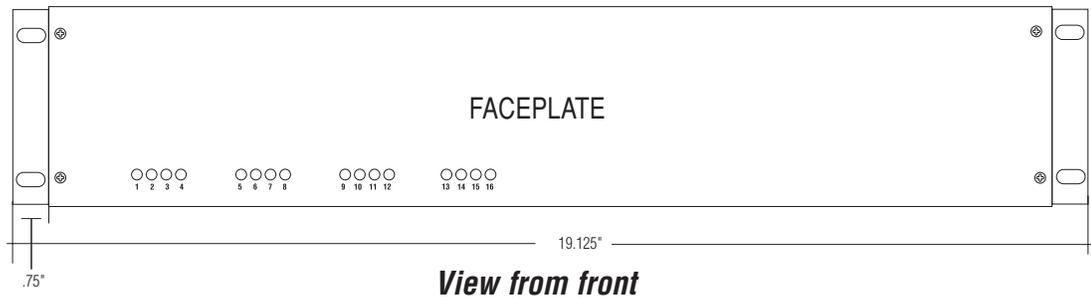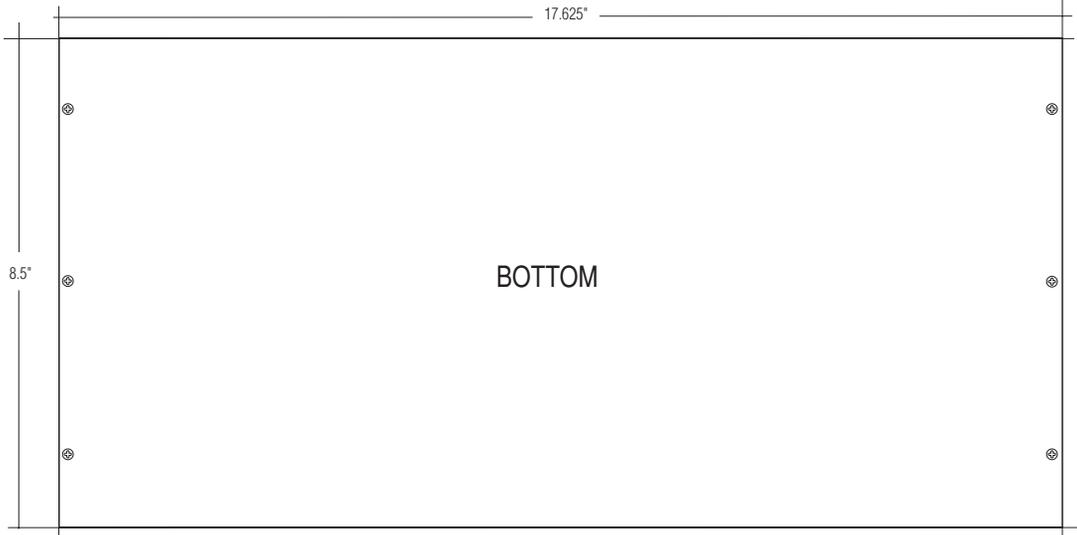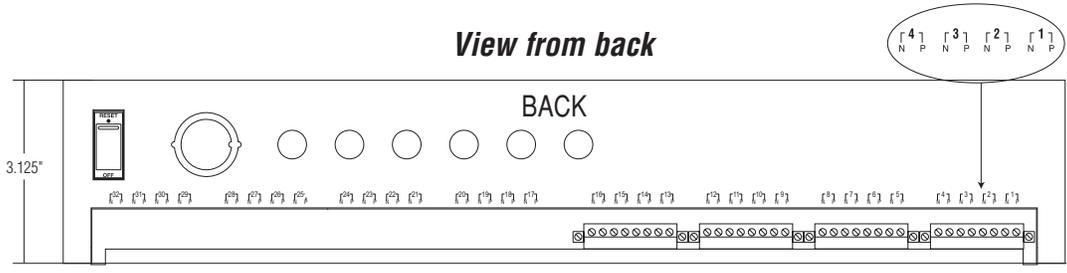

View from front