

# BCD-3000

Customer Display



Retail



Banking





Customer Service Center



Hospital

# Ideal for mPOS Display

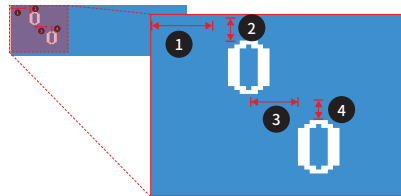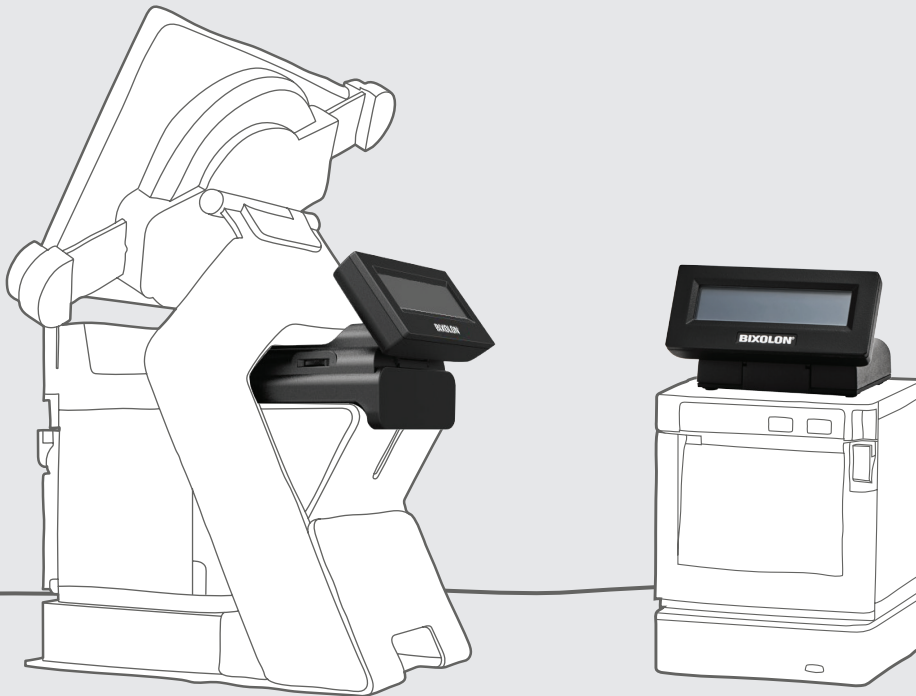

① Horizontal ② Vertical ③ Font space ④ line space

00000	Center Alignment
00000	Left Alignment
00000	Right Alignment



## Ultra-Compact

- 287% smaller than a standard customer display
- Multiple cable paths for user convenience

## User-Friendly Performance

- Flexible character alignment on display (Horizontal, vertical, font space and line space)
- Adjust alignment (Center, left and right)
- Enhanced by mono LCD with variable brightness
- 250% advanced as compared BCD-1000/1100
- Simple download and display image by utility
- Angle adjustable from 0 to 35°

## Hardware Compatibility

- Easy plug and play USB set up
- Compatible with all major operating systems including Android™, iOS™ and Windows®



# BCD-3000

## Mini Customer Display

### Specifications

#### Display

**Display Method**

STN LCD (mono)

**Display Color**

Blue / White

**Active Area**

96 x 19.2 mm

**Visual Area**

99 x 24 mm

**Brightness**

100 cd/m<sup>2</sup>

**Character Number**

20 Letters x 2 Lines

**Character Type(Set)**

95 Alphanumeric,  
6 International

**Character Font**

8 x 16

**Character Size**

4.8 x 9.6 mm

**Character Space**

0.05 mm

**Receive Buffer**

1Kbytes

**Emulation**

ESC/POS, CD5220

#### Power & Interface

**Power - Voltage**

USB: 5VDC±5% (USB Bus Power)

RS232: 5VDC±5%

**Power - Current**

500mA

**Interface**

RS232/USB

#### Software

**Driver**

Windows Driver, OPOS Driver

**SDK**

Windows SDK

Android SDK

iOS SDK

#### Exterior

**Body Color**

Ivory / Black

**Rotation Angle**

Vertical: 35

**Overall Dimension**

130 x 110.3 x 68.5

**Product weight**

250 g

#### Environment & Reliability

**Operating Temperature**

0 ~ 40°C / 32 ~ 104°F

**Operating Humidity**

10 ~ 80%

**Storage Temperature**

-20 ~ 55°C / -4 ~ 140°F

**Storage Humidity**

10 ~ 90%

**Reliability (Display)**

50,000 hours (Backlight)

