

CBM-230/231


CITIZEN®

FEATURES





High-Speed Printing
User-Friendly Compact Design
Very Quiet Printing
Semi Automatic Paper Loading
Bar Code Printing
Cash Drawer Kick-out
Compatibility (ESC/POS)

MODEL CLASSIFICATIONS

CBM-230/231- R F 120

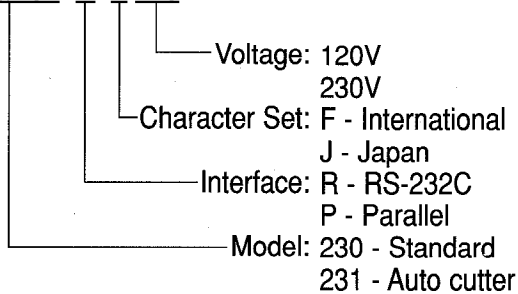

DIMENSIONS

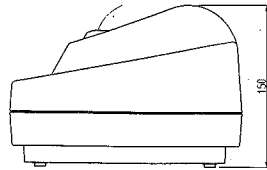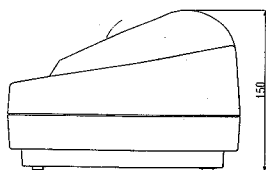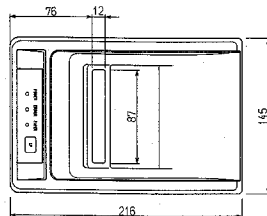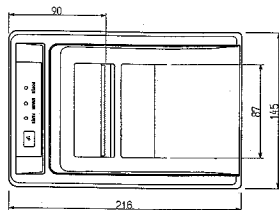

CBM-230

CBM-231

SPECIFICATIONS

Print Method	Line thermal printing
Dot Density	8 dots/mm or 203 DPI
Font	Font A: 12 x 24 Font B: 9 x 17
Number Of Columns	Font A: 48 Font B: 64
Character Size	Font A: 1.25 x 3.0 mm Font B: 0.88 x 2.13 mm
Print Speed	2.5" (62.5 mm)/Second
Paper Width	3.15" (80 mm)
Paper Thickness	2.56 mils
Maximum Paper Diameter	83 mm Ø
Print Width	72 mm, 576 dots
Interface	RS-232C or Parallel
Data Buffer	4K or 72 bytes selectable by user
Barcode	UPC-A / E, JAN(EAN)13 / 8 Code 39, ITF, CODABAR
Cash Drawer Kick-out	2 drives
Power Supply	100 / 115 / 230V AC
Power Consumption	Approximately 100 W
Dimensions (W" x D" x H")	5.7" x 8.5" x 5.9"
Weight	3.8 lbs. (230), 4.1 lbs (231)
Reliability	Pulse resistance: 50 million pulses Wear resistance: 30 km Auto cutter: 300,000 cuts
Operating Temperature	32°F to 104°F
Storage Temperature	-4°F to 140°F

CBM America Corporation

Headquarters
Two Executive Dr., Suite 645
Fort Lee, NJ 07024
800-421-6516 / (201) 944-1313
Fax (201) 944-6669

CITIZEN

CBM-230/231

HIGH-SPEED THERMAL PRINTER

