


DLI 9000 rugged mobile tablet

Finally. Five Powerful Payment Features. One Talented Machine.

Optional 5-in-1 payment module offers full service payment processing - magstripe, debit pin pad, contactless payment (NFC™), EMV™ & barcode scanning.



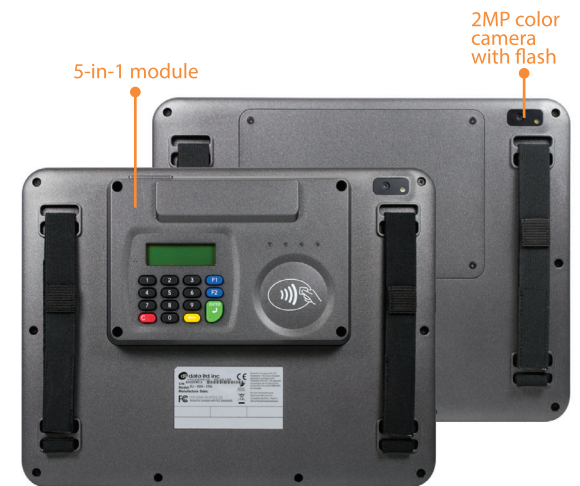

mobile
payment



wireless



dust



water



drop

Intel® Atom processor • 9.7" indoor/outdoor LCD
barcode scanner • magstripe • color camera • RFID
debit pin pad • GPS • WLAN • WWAN • WPAN

System

- **Casing** - impact-resistant ABS+PC polymer, IP54 rated, multiple 4ft drops to bare concrete
- **Processor** - Intel® Atom Z670 1.5GHz
- **Chipset** - Intel® SM35 Express, L2 cache: 512KB
- **Display** - 9.7" (1024x768) contrast ratio: 800:1
- 400NIT LED backlit indoor/outdoor readable
- **Touchscreen** - projective capacitive
- **Video** - 256MB RAM
- **Audio** - Intel® high definition audio; dual integrated speakers
- **Memory** - 2GB DDR2 800Mhz
- **Storage** - SATA micro SSD 64GB
- **Security** - trusted platform module (TPM 1.2)
- **Operating System** - Windows® 7 Pro/Ultimate, Windows® Embedded Standard 7, Windows® POSReady 7, Android® 3.2
- **Ports** - (1) USB 2.0, (1) HDMI, (2) I/O pass through connections to the cradle, (2) RF pass through connections to the cradle
- **Barcode Scanner** - integrated CMOS 1D/2D imager (OPOS/JPOS compliant) (optional 5-in-1 module)
- **Magstripe Reader** - integrated 3 track encrypted sensor, single head (OPOS/JPOS compliant) (optional 5-in-1 module)
- **RFID** - integrated reader ISO 14443 with SAM support (OPOS/JPOS compliant) (optional 5-in-1 module) *supports NFC™ & contactless payment*
- **EMV™ Smartcard Reader** - integrated EMV™ ISO/IEC 7816 contact reader (OPOS/JPOS compliant and supporting direct IO commands) (optional 5-in-1 module)
- **Debit Pin Pad** - integrated PCI certified debit pin pad (OPOS/JPOS compliant and supporting direct IO commands) (optional 5-in-1 module)
- **Keys** - (4) programmable keys, (1) power on/off key, (1) battery status key, (2) camera/barcode scanner keys (L & R side)

Environmental

- **Temperature** - operating: 0°F to +122°F (-17°C to +50°C)
- storage: -4°F to +149° (-20°C to +65°C)
- **Impact** - multiple 4ft drops to bare concrete
- **Vibration** - 5~500Hz 1G PTP
- **Shock** - operating: 20G (11ms), non-operating: 40G (11ms), crash: 50G (11ms)
- **EMI/EMC** - FCC class B, CE
- **Water/Dust** - IP54; dust: protected against dust, limited ingress; water: protected against sprays from all directions, limited ingress

Physical

- **Dimensions** - H: 8.11" (206mm), W: 10.35" (263mm), D: 0.60" (15.4mm)
- **Weight** - 2lb 4oz (with battery pack)
- 2lb 11oz (with battery pack & 5-in-1 module)
- **Warranty** - standard 1 year manufacturer's warranty
- available 1 or 3 year No-Fault Service Coverage (optional)
- **GPS** - ublox 6 chipset with internal active patch antenna
- **Camera** - color, (1) forward facing 1.3MP, (1) rear facing 2MP with flash
- **WiFi** - 802.11 a/b/g/n WiFi radio (Cisco® CCX4)
- **WWAN** - integrated Gobi3000™ GPRS/CDMA cellular card (optional)
- available cellular carriers: Verizon®, AT&T®, T Mobile®
- **Bluetooth** - class 2 radio
- **Voice** - integrated microphone, integrated 3.5mm mic/headset jack
- **Ambient Light Sensor** - integrated control via EC & OS
- **Power** - battery pack: 4000mAh lithium ion battery
(*6hrs of usage @ level 7 brightness) *Wifi, Bluetooth enabled
- AC adapter: 19V DC 65 watt 110/220V AC 50/60 Hz input, multi-country line cords available

Accessories

- **Desktop Cradle** - port replicator, (3) USB, (1) Ethernet 10/100, (1) VGA, (1) K-lock
- **Vehicle Cradle** - power filtering 10-60V input, port replicator, (3) USB, (1) Ethernet 10/100, (1) RS232, external cellular, WiFi and GPS antenna passive connections, (2) RF pass through connections, (1) K-lock
- **7-Bay Ethernet Cradle** - 7-bay unit charging cradle with Ethernet 10/100 switch

DLI 9000 rugged mobile tablet



computing without boundaries

Revision 1.7 2/19/13

Information in this document is subject to change without notice.