



Intermec

Product Profile



- Powerful Intel™ P-III Ultra Low Power 800 MHz processor
- Choice of leading Microsoft® Windows® CE .NET and XP operating systems
- Bluetooth™ accessory support
- Brilliant 12.1" (30.73cm) TFT touch screen display
- Standard 802.11b/g radio with choice of wireless security protocols
- Integrated radio for wireless scanner support
- Extreme temperature option
- Compact, rugged design for industrial environments

CV60 VEHICLE MOUNT TERMINAL

Continuing Intermec's legacy reputation of developing reliable terminals, the CV60 computer excels in the most adverse environments with full PC functionality. The CV60 terminal, either fixed or vehicle mounted, puts wireless supply chain management right where the data is—at the dock, on the warehouse floor, in the trailer or in the yard—for the toughest material handling applications.

The CV60 offers choices of either wired or wireless accessories. Because the CV60 has integrated Intermec's own wireless scanning base station, it can support Intermec's 1552 wireless scanners. By integrating *Bluetooth™ technology in the CV60, the user has fewer accessories to install, cables to contend with and tethered wires to get in the way. This eliminates costly cable replacement and improves user satisfaction.


The modular design allows for the convenient swap-out of hard drives. By integrating dual-diversity antennas, mounting of the CV60 is streamlined. This industry-leading design also provides seamless network connectivity within the Enterprise. This saves time, lowers the

cost of overall ownership and permits on-site personnel to upgrade hardware quickly and efficiently.

In addition, a brilliant 12.1" (30.73cm) high resolution TFT SVGA color display simplifies user interaction with touch-screen capabilities and color graphics.

With a choice of hard drive technologies, the CV60 excels in vehicle-mount environments. A uniquely designed vibration and shock dampening solution is offered for rotating drive applications, as well as an industrial grade solid state solution for the most demanding environments including freezing temperatures. The system can also avoid inadvertent shutdowns and power loss, common to material handling vehicles, with an uninterruptible power supply (UPS).

The cast magnesium housing of the CV60 received an IP65 seal rating. With a heated display option and chemically hardened glass that is 50% thicker than industry standard, the CV60 can withstand harsh environments where dust, moisture or extreme temperatures are a constant.

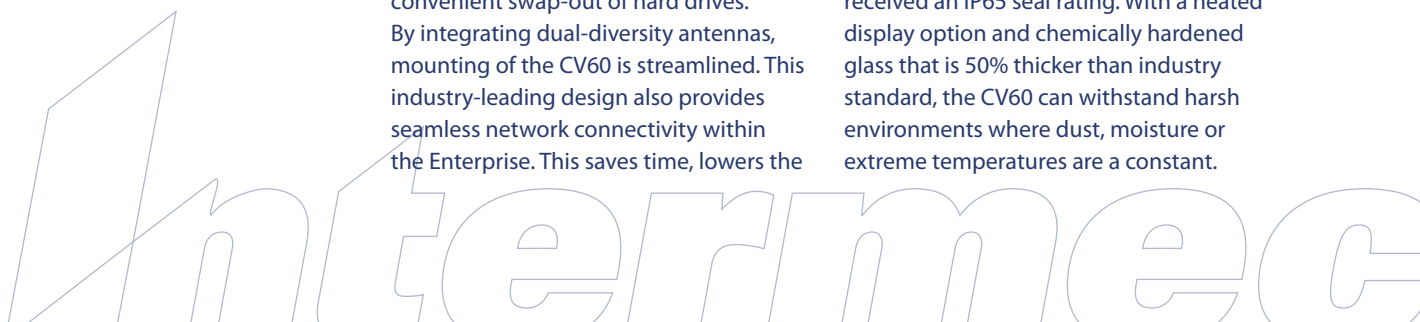

Intermec

State-of-the-art, industry-standard development tools, such as Microsoft's .NET Compact Framework, Visual C++™, Visual Basic™, Java® and HTML™ can be used with CV60. The CV60 will also accommodate thin, thick or browser-based applications.

Physical Description

With a cast magnesium housing, the CV60 is a rugged computer designed for real time data collection applications, using either a vehicle or stationary mount, in manufacturing, warehousing, distribution, and transportation environments.

Physical Characteristics

Height: 27.1cm (10.67")
Width: 34cm (13.4")
Depth: 9.5cm (3.7")
Weight: 5 kg (11 lbs.)

Environmental

Standard Operating Temperature:
-20° to 50° C (-4° to 122° F) – Solid State
0° to 50° C (32° to 122° F) – Rotating

Extreme Operating Temperature:
-30° to 50° C (-22° to 122° F) – Solid State
HDD (With heated display option)

Storage Temperature:
-30° to 70° C (-22° to 158° F)

Humidity:
5 % to 95 % RH Non-condensing

Shock and Vibration Protection:
Withstands standard material handling vehicle environments. Meets or Exceeds MIL STD 810F

Rain and Dust Resistance: Sealed to IP65 (Dust tight and jetted water)

Standard Features

Power: Choice of two external DC/DC converters 6-36 VDC input DC/DC for 12V - 24V systems (gas truck)
15-96 VDC input DC/DC for 24-72V systems (electrical truck)

AC/DC Converter

Uninterruptible Power Supply option for unstable power sources

Hardware

Memory: 128MB SDRAM standard; expandable to 256MB or 384MB; 512KB Flash

Microprocessor: Intel P-III Ultra Low Power 800MHz embedded processor

Display: Brilliant 12.1" Color TFT 800 x 600 SVGA; 100 degree viewing angle; 300 NIT; Heated Option

User Interface: High resolution, resistive touch panel

Operating Systems

Windows CE .NET 4.2
Windows XP Professional Edition
Windows XP Embedded

Hard Drive Options

Solid State drive options for rugged, vehicle / freezer based applications
Shock/Vibration dampening rotating drive option for stationary, standard temperature and select mobile applications

Network Connectivity

10BaseT/100BaseT Ethernet

Application Connectivity

Supports Terminal Emulation (TE 2000) applications.

Supports standard application environments including Win32 Microsoft Foundation Classes (MFC), Microsoft .NET Framework and Microsoft .NET Compact

Cisco Compatible Extensions

Version 1 Supported
LEAP
CKIP
VLAN

Integrated Radio Options

Wireless LAN

Data Rates: Up to 54 Mbps per IEEE 802.11g

Standards Compliant:

IEEE 802.11g - 2.4 GHz
IEEE 802.11b (2.4 GHz - DSSS)

Radio Power: 50 mW

Security: WEP, WPA, 802.1x (EAP-TLS, TTLS, LEAP, PEAP)

Certifications: Wi-Fi, WPA, CCX Program

Compliance: FCC Part 15, CE mark

Wireless PAN

Integrated Bluetooth™ compatible module

Antenna Options

Integrated diversity antenna options for LAN, Bluetooth and bar code scanner.

Remote patch LAN antenna

Data Collection Scanner Support

Tethered serial bar code scanner

Tethered RFID scanner

Integrated radio for wireless scanner support

Interfaces

(2) Standard Serial Ports – DB9

(2) USB Host ports v1.1

(1) PS/2 Keyboard Port

(1) Locking Power Input

On / Off Switch

Audio 3.5mm stereo jack

Microphone In / Mono Output (VoIP ready)

2.5mm jack

Internal Speaker / Beeper

Accessible Expansion Slots

One 6.4cm (2.5") IDE drive bay

One Solid State type II card Bus slot

*Bluetooth™ is a trademark owned by the Bluetooth SIG, Inc., USA.

North America

Corporate Headquarters
6001 36th Avenue West
Everett, Washington 98203
tel: 425.348.2600
fax: 425.355.9551

Systems & Solutions
550 2nd Street S.E.
Cedar Rapids, Iowa 52401
tel: 319.369.3100
fax: 319.369.3453

Media Supplies
9290 Le Saint Drive
Fairfield, Ohio 45014
tel: 513.874.5882
fax: 513.874.8487

Canada

7065 Tranmere Drive
Mississauga, Ontario
L5S 1M2 Canada
tel: 905.673.9333
fax: 905.673.3974

Europe/ Middle East & Africa

Headquarters
Sovereign House
Vestern Road
Reading RG1 8BT
United Kingdom
tel: 44.118.987.9400
tel: 44.118.987.9401

Asia

Asia Regional Office
26-16 International Plaza
10 Anson Road
Singapore 079903
tel: 65.6324.8391
fax: 65.6324.8393

Intermec International, Inc.
14 Floor, IBM-Pacific Century
Place
2A Workers Stadium
Chaoyang District, Beijing
100027
P.R. China
tel: 86.010.6539.1012
fax: 86.010.6539.1025

Australia

Level 7, 200 Pacific Highway
Crows Nest, NSW 2065
Australia
tel: 61.2.9492.4400
fax: 61.2.9954.6300

South America & Mexico

Intermec South America Ltda.
Rua Arandu 1544-15 andar
Edificio Itavera
Brooklin Novo 04562-031
Sao Paulo, SP
Brazil
tel: 55.11.5501.2070

Intermec Technologies de Mexico

Tamulipas 141, Primero Piso
06140 Mexico, D.F.
tel: 525.55.211.1919
fax: 525.55.211.8121

Worldwide

Fax Document Retrieval Service
800.755.5505
(North America Only)
tel: 650.556.8447

Internet

www.intermec.com

Sales

800.347.2636
(toll free in N.A.)
tel: 425.348.2726

Service and Support

800.755.5505
(toll free in N.A.)
tel: 425.356.1799

Copyright © 2004 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners. Printed in the U.S.A. 611406-02C 04/04

In a continuing effort to improve our products, Intermec Technologies Corporation reserves the right to change specifications and features without prior notice.