

PRODUCT SPECIFICATION

DOCUMENT NUMBER PS105110	MODEL PS105 Rack Mounted Power Supply, 28 VAC 5 Amp PS110 Rack Mounted Power Supply, 28 VAC 10 Amp
REVISION NUMBER 100404	Components of the UTPLinks™ System

Description

Power Supplies for the UTPLinks™ Video, Data & Power, Twisted Pair Transmission System


The **PS105** Power Supply provides 5 Amps of current. Power is provided to the CX Model Crossover unit in the UTPLinks System for insertion and distribution to up to 16 fixed cameras by the CX Unit. The **PS110** Power Supply performs the same functions as the PS105 except the PS110 provides 10 Amps of current, for fixed cameras and PTZ. The number of cameras and/or PTZ units that can be powered by either the PS105 or PS110 is dependent upon the current requirements of the equipment being powered. Contact *NITEK* Tech Support for information regarding specific PTZ equipment. The PS105 or PS110 can be located at a mid-span position; i.e. IDF closet or at the "Head-End". These Power Supplies must be located in close proximity to the CX Units.

Features

- Power is provided to cameras and PTZ units in a closed, self-contained system
- PS105 and PS110 Units mount in a 19" rack
- Easy to install and configure
- Designed to be compatible with "Structured Cabling" standards
- Video, data & power can be run in the same Cat 5 cable without interference



PS105
PS110

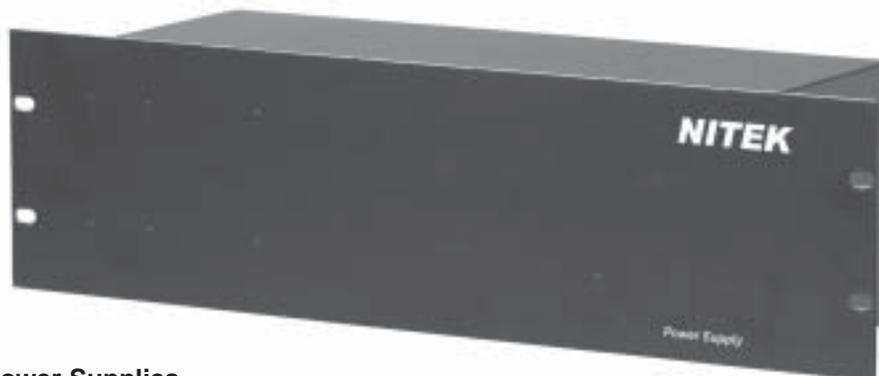

PS105/PS110 Power Supplies

Size	5.25"H x 19.0"W x 10.0"D
Power Requirements (input)	120 VAC
Output Voltage	28 VAC
Output Current	
PS105	5 Amps
PS110	10 Amps
Enclosure Type	Standard 19" Rack 3 RU in Height

Patent Pending
UTPLinks is a trademark of Nitek

Specifications subject to change without notice.
© Copyright 2004 Nitek

NITEK®

5410 Newport Drive, Suite 24 • Rolling Meadows, IL • 60008
Phone: (800) 528-4343 • (847) 259-8900 • Fax: (847) 259-1300
E-mail: info@nitek.net • Internet: www.nitek.net