

POS X

POINT OF SALE
PERFECTED

EVO TouchPC

Designed to set a New Standard for Value, the EVO TouchPC by POS-X combines a sleek new look, ultra stable Intel Atom processor and solid fanless construction at a price point to fit all budgets. Powerful yet energy efficient, the EVO TouchPC is the perfect choice for retail, restaurant or warehouse applications.




Key Features

- Stable Intel Atom 1.6ghz Processor
- Up to 2GB DDRII RAM
- 15" Active Matrix Touch Display
- Fanless - Ideal for Dusty or Dirty Environments
- Energy Efficient - Maximum 65 Watt Power Consumption
- Optional Integrated MSR, Customer Display or 8.4" Rear LCD
- 3 Year Advanced Replacement Protection

all-in-one touchpc

EVO TouchPC Specifications

PART NUMBER	EVO-TP1
MOTHERBOARD	C36
CPU	Intel® Atom N270 procesor 1.6Ghz
Chip Set	Intel® 945 GSE Express + ICH7M
System Memory	1~2 GB DDR II
Video	Integrated Intel® GMA® 950 Graphics Engine up to 224 MB shared
PORTS	
USB	4 x USB2
Serial	4 xRJ 45 COM (Com1, Com2, Com3 RS232 Com4 with 5V/12V)
LAN	1 Realtek RTL8111C-GR 10/100/1000 baseT LAN
VGA	1 x Additional VGA Port
Cash Drawer Port	1 x RJ11 (12V/24V cash drawer)
HARD DRIVE	1 x 2.5" 80 GB
PHYSICAL	
Housing	ABS
Weight with Base	12.13 lbs
Dimensions with Base	14.37" (W) x 10.94" (D) x 11.69" (H)
Tilt Angle	0° to 90°
Optional Mounting	VESA 75 x 75 mm
Housing Color	Black
LCD Display	15" 1024 x 768 pixel, 16.7M colors 250 nit
Touch Screen	5-Wire Resistive, 35+ millions taps per location
ELECTRICAL	Ext. 65W 19V 3.4 A
ENVIRONMENTAL	
Temperature	41°F to 95°F operating
Humidity	20% - 80% non-condensing
WARRANTY	3 Year Limited
CERTIFICATIONS	FCC, CE, LVD, RoHs
OPERATING SYSTEM	None/ WIN 2000/WIN 2000 Pro/XP Home/XP Professional/VISTA/Linux/ Windows Embedded

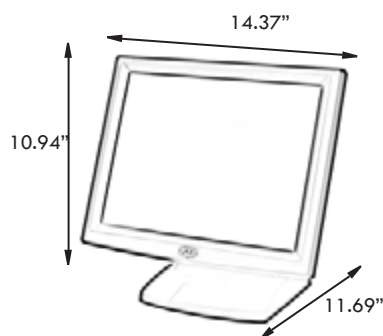

ACCESSORIES	
EVO-MR1-U	3 Track MSR with USB interface
EVO-RD1-VFD	Integrated Customer Display
EVO-RD1-LCD8	Integrated Rear Display, 8.4" LCD, VGA
EVO-XZ1-M75	Universal VESA Mount for All TouchPC & Touch Monitors