

POS X

POINT OF SALE
PERFECTED

XPC515 SERIES

PERFORMANCE ALL-IN-ONE TOUCHPC

The XPC515 Series TouchPC combines a crisp 15" LCD Display, powerful performance and a small footprint you need with the reliability and value you expect. With its stable Intel-based chipset, splash-resistant touchscreen and industrial grade housing with EZAccess clam shell design, the XPC515 is truly the "Best of Both Worlds". Perfect for any hospitality/retail environment or any location requiring a comprehensive solution, the XPC515 is in a class of its own.



KEY FEATURES


- CPU: Intel® 2.8GHz Celeron ~ Core 2 Quad
- Memory: 1~ 4 GB DDR II RAM
- Optional integrated MSR and Customer Display
- Rugged spill resistant metal housing
- EZAccess Clam Shell Design
- Bump-free 90-degree tilting base
- Stable Intel chipset
- 3 year warranty



ALL-IN-ONE TOUCHPC

XPC515 Series Specifications

PART NUMBER	XPC515-C	XPC515-P
MOTHERBOARD	G31-M7	
CPU	Intel® 2.8 GHz Celeron ~ Core 2 Quad	
Chip Set	Northbridge Intel® G31	Southbridge Intel® ICH7 FSB 800-1600 MHz
System Memory	1~4 GB DDR II	
Video	Integrated Intel® GMA® 3100 Graphics Engine up to 256MB shared	Optional Secondary Video
Audio	Realtek® ALC662	
PORTS		
USB	6 x USB2	
Serial	3 x RS232 optional configurable powered 5V/12Vby Jumper D-Sub 9 Pin Male	
Parallel	Supports SPP/ECP/EPP mode D-sub 25-pins Female	
LAN	1 Realtek RTL8102EL 10/100 Mb/s LAN	
Mouse	1 x PS/2	
Keyboard	1 x PS/2	
Audio	1x Line-in/ Line-out/ MIC-in/ Center-LFT/ Surback/ Surround 3.5mm Audio-Jack	
HARD DRIVE	1 x 2.5" 160 GB	
PHYSICAL		
Housing	Metal Housing, ABS Bezel	
Weight with Base	26 lbs	
Dimensions with Base	15" (W) x 9.5" (D) x 13.5" (H)	
Tilt Angle	0° to 90°	
Optional Mounting	VESA 75 x 75 mm	
Housing Color	Black	
LCD Display	15" 1024 x 768 pixel, 16.7M colors 250 nit	
Touch Screen	5-Wire Resistive, 35+ millions taps per location	
ELECTRICAL	200W	
ENVIRONMENTAL		
Temperature	32°F to 114°F operating	
Humidity	10% - 95% non-condensing	
Shock Resistance	Operating shock 5g	
WARRANTY	3 Year Limited	
CERTIFICATIONS	FCC Class A, CE, RoHs	
OPERATING SYSTEM	None/ WIN 2000/WIN 2000 Pro/XP Home/XP Professional/VISTA/Linux/ Windows Embedded	

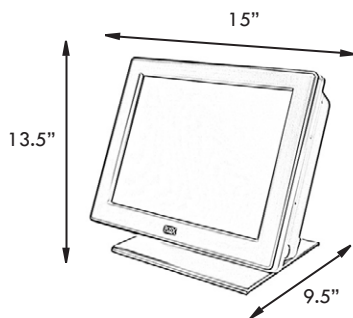

ACCESSORIES	
XM130U	3 Track MSR with USB interface
XM135-BIO	3 Track MSR with USB interface & Fingerprint Authentication
XP2200S	Integrated Customer Display