


- Flexible features designed to exceed your POS requirements
- Integrated biometric reader, touch display, magnetic strip reader (MSR) and keyboard
- Fanless design in a small yet powerful all-in-one solution



Keypad

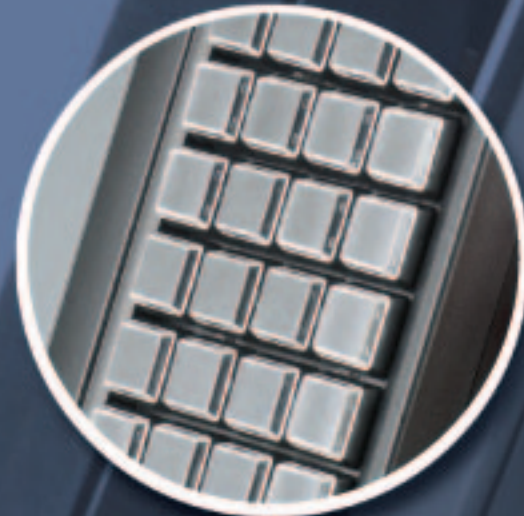

MSR



Biometric



Rear Display



Announcing the New Partner Tech 6900 point of sale solution.

Innovation

- Proven 3rd generation fanless design • Small footprint
- Optional integrated biometric fingerprint reader, credit card reader and keyboard.
- Enhanced touch screen features • Ultra fast 10/100/1G integrated network interface
- Larger hard drive • Open architecture handles most Microsoft XP and Linux based software applications • Multiple accessory designs to fit your need (optional rear display shown)
- Tool Free design for easy servicing • Integrated uninterruptible power supply

Reliability

- Tested to withstand the punishment POS equipment must endure
- Integrated connectivity ports to ensure no loose cables
- Capacitive or resistive touch screen versions available
- Custom On-Site and Depot Warranty programs available

This sleek yet economical POS system is built to work in the typical harsh retail, hospitality and food service environments. It is engineered for easy set-up, quick serviceability and rigorous use that are characteristic of most POS settings. With simple access to connectivity for peripherals and a built-in open architecture to load any Microsoft/Linux based software, the Partner Tech 6900 helps lower your total cost of ownership and increase sales efficiency.



wall-mount

As a 20 year old OEM, Partner Tech products and service continually exceeds our customers' expectations.

Specifications

Processor	Intel Celeron-M 1GHz CPU
System Memory	256MB DDR up to 2GB, 2 memory slots
LCD	15" Active TFT color
Resolution	800x600, 1024x768
Brightness	250 nit
Viewing Angle	0° to 60° tilt
Touch Screen	ELO 5-wire resistive or optional capacitive
Network	Ethernet 10/100/1G
Storage	3.5" 80G hard drive
Expansion Options	• Compact flash card socket, IDE interface • 1 mini-PCI
Power Supply	100~240vAC, DC+19V, 90W power adaptor
IO Ports	• 4 D-sub 9 RS232 ports provide +5/12V through jumper free BIOS setting • 1 Parallel port • 1 PS/2 KB • 1 PS/2 mouse • 2 USB 2.0 ports in front • 2 USB 2.0 ports in rear • 1 DB-15 VGA port • 1 RS45 LAN port • 1 RJ-11 24Vdc cash drawer port supports two cash drawers • 2 Audio ports (1 line-out, 1 MIC-in)
Operation System	Windows 98/2000/XP/XP E/CE.Net/WEPOS/Linux
Peripherals	• Dual or three track magnetic reader • Biometric Reader, Smart Card Reader • KB-32 32 key keypad • 2x20 VFD customer display
Temperature	• Operating Temperature: 0~40°C • Storage Temperature: -20~60°C
Humidity	• Operating Humidity: -20%~85% • Storage Humidity: -5%~85%
Dimension	• Physical: 12.5(W)x10.0(D)x13.8(H)inch • Package: 18.5x16.1x17.7inch
Weight	22 lbs
Certification	CE/FCC Class A, UL, cUL, VCCI, BSMI, ROHS

*Specification subject to change without prior notice



Partner Tech USA Inc.
51 PARKER IRVINE, CA 92618, USA.
Tel: 949-598-1888 Fax: 949-598-0088
sales@partnertechcorp.com
www.partnertechcorp.com



REPRESENT BY: