


PowerDsine PoE Extender

Extends Power over Ethernet Installations to 200 meters

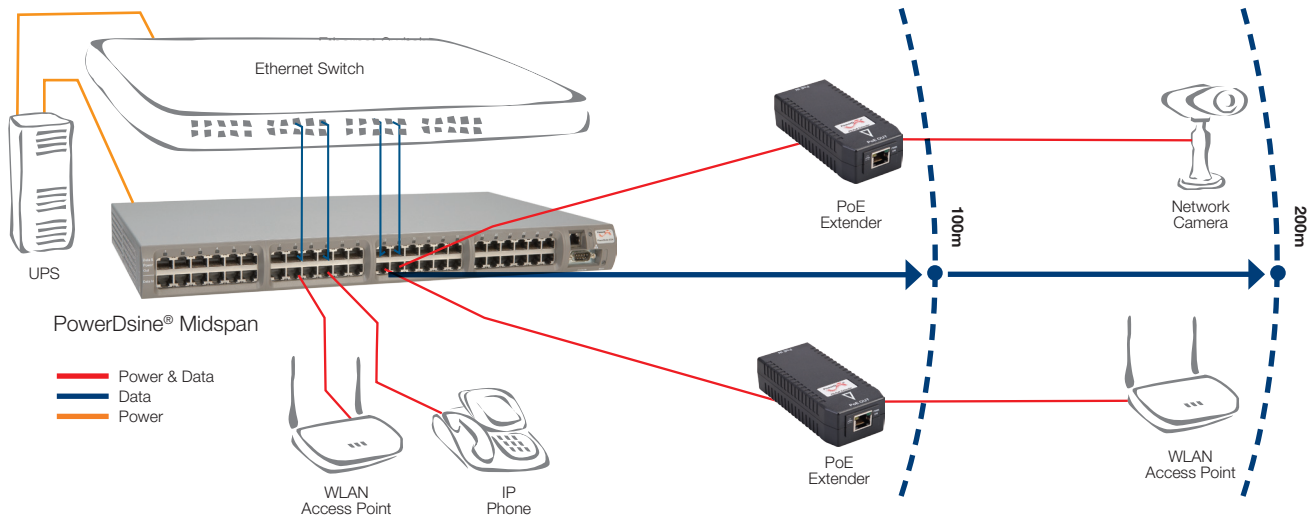

Overview

The PowerDsine PoE Extender is a cost effective way to extend the Ethernet network range beyond 100m, delivering both data and power to network devices such as WLAN Access Points and Network Cameras up to a distance of 200m while complying with IEEE PoE and Data standards.

The PoE Extender supports 10/100/1000Mbps data rates and delivers 802.3at power levels, up to 25.5W. The PoE Extender does not require local power and is powered via the PoE input.

PSE Source	PD Available Power @ 200m
4-pairs IEEE802.3at PSE (60W) (e.g. PD-95xx Series)	25.5W (802.3at PD)
IEEE802.3at PSE (30W) (e.g. PD-90xx Series)	12.95W (802.3af PD)
IEEE802.3af PSE (15.4W) (e.g. PD-35xx, PD-65xx Series)	12.3W (802.3af Class 2 PD)

PoE Extender Features

- Extended PoE installation range by additional 100m
- Supports 10/100/1000Mbps data rates
- Provides 802.3af power levels when powered by any 802.3at source
- Provides 802.3at power levels when powered by PowerDsine 95xx Midspans
- Extenders can be cascaded to reach up to 500m
- Cost effective installation — no need for local power
- Plug and play installation — no configuration needed

PoE Extender Specifications

Pass Through Data Rates	10/100/1000 Mbps
Power over Ethernet Output	Pin Assignment and Polarity: 3/6 (+) and 1/2 (-) Output Power Voltage: 45-55Vdc
Input Power Requirements	PoE supports alternatives A and B DC Input PoE Voltage: 46-57Vdc Max Input Current: 0.7A
Dimensions	110 mm x 50 mm x 30 mm 4.33 in. x 2 in. x 1.12 in
Weight	.22 lbs (100g)
Indicators	System Indicator: DC Power Input/Output (Green) Ethernet Data Input/Output (Orange)
Connectors	Shielded RJ-45, femal socket
Environmental Conditions	Operating Ambient Temperature: 32° to 104°F (0°C to 40°C) (1G rate) 32° to 122°F (0°C to 50°C) (10/100 rate) Operating Humidity: Maximum 90%, Non-condensing Storage Temperature: -4° to 158°F (-20° to 70°C) Storage Humidity: Maximum 95%, Non-condensing
Reliability	MTBF: 150,000 hrs. @25°C
Thermal Rating	17 BTU/Hr (@Full Load)
Warranty	1-year
Regulatory	IEEE 802.3at (PoE), RoHS Compliant, WEEE Compliant, CE
Electromagnetic Emission & Immunity	FCC Part 15, Class B EN 55022 Class B (Emissions) EN 55024 (Immunity), VCCI
Safety Approvals	UL/cUL Per IEC60950 GS Mark Per IEC60950

Ordering Information

Part Number	Description	Ports
PowerDsine PoE Extender	High Power Gigabit Extender	1-port

For More Information

North America

PowerDsineUSA@microsemi.com

EMEA

(Europe, Middle East, Africa)

PowerDsine@microsemi.com

LATAM

(Latin America)

PowerDsineLATAM@microsemi.com

APAC

(Asia Pacific)

PowerDsineAPAC@microsemi.com



Microsemi

Power Matters.

Microsemi Corporation (NASDAQ:MSCC) offers the industry's most comprehensive portfolio of semiconductor and networking technology. PowerDsine® PoE Systems, a Microsemi brand, is the thought leader in energy efficient, high power PoE technology. Learn more at microsemi.com/powerdsine

©2011 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

MSC-PD-DS-PoEExtender-8.2011