

## PRINTRONIX PRINTCART

The Printronix PrintCart is the best-in-class mobile workstation for demanding wireless printing and business applications. The innovative self-defending controller automatically balances business needs with optimal power system performance. There are no controls to operate. On connection to line power the cart automatically switches equipment to AC power while simultaneously charging the battery.


The PrintCart offers maximum readiness with a power system that is replaceable in less than 10 minutes and off-the-shelf power cords that are user replaceable in under a minute without tools.

### KEY FEATURES

- Power a printer and terminal for up to 20 hours (12 hours under heavy use)
- Fully recharge in about 4 hours
- Integrated charger-inverter-transfer switch automatically and optimally manages energy sources
- Simple, easy to read display panel with battery status “gas gauge”, audible recharge alarm and advance warning of battery exhaustion
- Rugged, powder coated, welded steel frame
- Pull-out printer shelf enhances serviceability
- Tight turning and long distance mobility with short wheel base & large, ball bearing wheels
- Large stainless steel work surface
- Accessory Pack: Includes utility drawer, media and scanner storage, refuse bin and notebook holder
- Configurable for external charger and/or exchangeable battery pack for continuous operations
- Innovative self-defending controller extends battery longevity by limiting deep battery discharge and short cycle charge times



Shown with T5000r printer (not included)

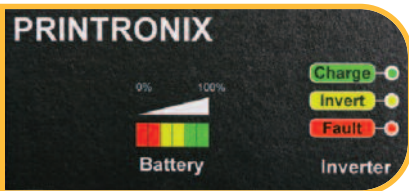

PHYSICAL SPECIFICATIONS	
Height (SS top/barcode storage)	40"/47" (101.6cm/119.4cm)
Width (frame/wheels)	21"/22" (53.3cm/55.9cm)
Length (SS top/handles)	25"/36" (63.5cm/91.5cm)
Weight (w/o printer or terminal)	280 lbs (127kg)
Printer Shelf Load Capacity	70 lbs (32kg)
Work Surface	Stainless Steel - 21" (53.3cm) wide x 25" (63.5cm) long
Printer Slide-out Shelf	Painted Steel – 14" (35.6cm) wide x 20.25" (51.4cm) long w/ pre-drilled mounting for 4" or 6" Printronix thermal bar code printer; includes shock mounting hardware
Printer Shelf Extension	10" (25.4cm)
Wheels	2 - 5" (12.7cm) caster, one locking (front); 2 - 8" (20.3cm) fixed wheel (rear)

ELECTRICAL SPECIFICATIONS	NORTH AMERICAN (120VAC/60 HZ)	EUROPEAN (230VAC/50HZ)
Battery Capacity	Typical Recharge Time - battery cannot discharge below 30%	
2 x 100 Amp-hour	3.2 hours	3.2 hours
Battery Type	Sealed Lead Acid, Absorbed Glass Mat (AGM)	
AC Inverter Output	120V/60Hz/1Ø @ 750w	230V/50Hz/1Ø @ 600w
12VDC Charger Capacity	45A	45A
Input Current (maximum)	15A @ 120VAC	8A @ 230VAC
Input Plug	NEMA 5-15 male 3 prong plug	User selectable (IEC 320 male socket connector)
Output Receptacle	2 each NEMA 5-15 GFCI	4 each IEC 320