

42" Full HD LED Professional Display

Optimized Entertainment for Hospitality Environments

CDE4200-L



The ViewSonic® CDE4200-L is the ideal display solution for business, hotel, and hospitality environments. The 42-inch Full HD LED professional display features versatile input connectivity including HDMI (x3), VGA, Composite, and YPbPr. With a brightness of 350 nits, and a 3000:1 contrast ratio, this LED panel display delivers stunning brightness and contrast at a 6.5ms response time to ensure crisp pictures and smooth playback. Built-in 10W (x2) speakers and SPDIF digital audio output provide crystal-clear sound. In addition, the CDE4200-L includes USB cloning for easy duplication in multi-screen environments. The CDE4200-L also features automated control using RS-232, HDMI® CEC control, and IR pass through for easy connection to HD set-top-boxes, media players, and Blu-ray™ players. A programmable hospitality menu allows for custom calibration of features such as channel defaults, audio levels, and power up—making the CDE4200-L ideal for use in hospitality applications.

42" Full HD 1920x1080 Display Resolution

The CDE4200-L has everything you expect from a ViewSonic display—delivering stunning clarity and color performance with full HD resolution.

Hospitality Mode for Automated Multi-screen Control

The CDE4200-L is great for multi-screen setups in hotels, restaurants, sports bars, or retail outlets that require automated control and customizable presets. With a programmable hospitality setting, each television can have the same customized channel default, audio level, front-panel lockout, and auto power-up settings.

USB Multimedia Playback & Cloning

With the handy PC-less USB playback feature, photos and music can be immediately played and shared by plugging a USB drive into the display. In addition, the CDE4200-L includes USB cloning for easy duplication in multi-screen environments.

Automated Control

RS-232 and CEC control port allows for automated control of the television's remote control features, while IR Pass Through provides compatibility between 3rd party remote controls and hospitality set-top-boxes.

Energy Saving LED Panel

LED backlighting enhances display performance and delivers an outstanding color range, while a brilliant 3,000:1 contrast ratio and 350 nits of brightness provides for remarkably detailed images.

Versatile Input Connectivity

VGA, YPbPr, and USB inputs provide extreme flexibility, while 3 HDMI ports allow connection to HD set-top-boxes, media players, and Blu-ray players.


42" Full HD LED Professional Display

CDE4200-L



Applications

- Hospitality / Entertainment display
- Business / Educational display – boardroom and classroom
- Digital signage – small to mid-size business
- Medical office and waiting room entertainment displays
- Hotel guest room entertainment
- Sports bar and restaurant entertainment displays

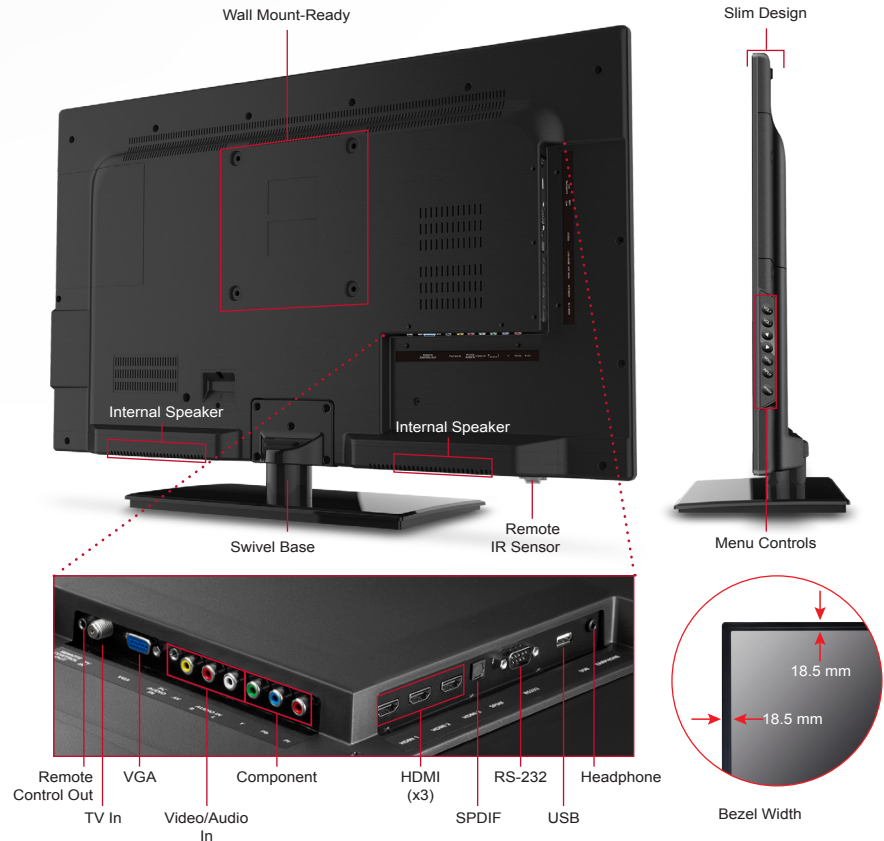

Specifications

LCD PANEL		Type	42" color TFT active matrix, wide LCD with WLED Backlight
		Display Area	36.6" horizontal x 20.6" vertical; 42" diagonal
		Optimum Resolution	1920x1080, 600mm dot pitch
		Contrast Ratio	3000:1 (typ)
		Viewing Angles	170° horizontal, 170° vertical
		Response Time	6.5ms
		Light Source	Long life, 30,000 hrs. (typ)
		Brightness	350 cd/m² (typ)
		Aspect Ratio	16:9
		Panel Surface	Anti-glare, hard coating (3H)
INPUT		Video Input	HDMI, component, VGA, CVBS
		Control Input/Output	RS-232
		USB 2.0	JPEG, MP3
AUDIO OUTPUT			Internal 10-watt speakers (x2), SPDIF optical
INPUT SIGNAL		TV/Video Comp.	480i, 480p, 720p, 1080i, 1080p
CONNECTOR		Analog	15-pin mini D-sub (VGA), RCA Audio In, headphone out
		Digital	HDMI (x3), YPbPr, CVBS, SPDIF, USB
		Power	3-pin plug
CONTROLS		Panel Picture	Menu, VOL +/-, Down/Up, Input, Power
			Picture Mode, Brightness, Contrast, Color, Tint, Sharpness, Backlight, Screen Size, Auto Adjust, H. Position, V.Position, Clock, Phase, Color Temperature, Dynamic Contrast, Film Mode, Noise Reduction, MPEG Noise Reduction
		Sound	Sound Setting, Digital Audio Output, Equalizer Setting, SRS Setting
		Parental	Lock Parent Control, V-Chip, Movie Rating, English Rating, French Rating, Block UnRated Show, Change Password, Keypad Lock, Source Lock, System Lock
		Setup	Closed Caption, Menu Language, Clock, OSD Transparency, Time Zone, Auto Clock, Setup Time, Day of Week, Daylight Saving Time, Time Format, OSD Timer
		Others	Blue Back, No Signal Power Off, No Operation Power Off, All Reset, Audio Only, Display ID, Usage Monitor

ERGONOMICS	Swivel	-15° to +15°
POWER	Voltage	AC 100–240V (universal), 50–60Hz
	Consumption	59W (typ)
OPERATING CONDITIONS	Temperature	32–104°F (0–40°C)
	Humidity	20–80% (non-condensing)
DIMENSIONS (W x H x D)	Physical With Stand	38.4 x 24.6 x 8.2 in. / 974.2 x 626 x 210 mm
	Physical Without Stand	38.4 x 22.3 x 2.5 in. / 974.2 x 567 x 64.4 mm
	Packaging	47.2 x 27.6 x 5.6 in. / 1200 x 700 x 143 mm
BEZEL DIMENSIONS	Left / Right	18.5mm / 18.5mm
	Top / Bottom	18.5mm / 18.5mm
WEIGHT	Net With Stand	35.4 lb. / 16.1 kg
	Net Without Stand	29.2 lb. / 13.3 kg
	Gross	34.0 lb. / 15.4 kg
WALL MOUNT	VESA®	200mm x 200mm
REGULATIONS		FCC, CE, UL, RoHS
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state or federal laws.
WARRANTY		Three-year limited warranty on parts, labor and backlight

What's in the box?

CDE4200-L display, power cable, remote control with batteries, swivel base, User Guide, Quick Start Guide



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

Specifications and availability are subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. HDMI, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. TruSurround HD and the SRS Logo are trademarks or registered trademarks of SRS Labs. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2014 ViewSonic Corporation. All rights reserved. [17044-01B-07/14]

Sales: (888) 881-8781 or SalesInfo@ViewSonic.com • More product information: www.ViewSonic.com