

# 55" Narrow Bezel Full HD 1080p Commercial Large Format Display

Simple Multimedia Scheduling and Playback

**CDE5500-L**



Deploy digital signage with ease, with the ViewSonic® CDE5500-L 55" commercial LED display. Load and distribute content to multiple displays via your LAN, send content wirelessly from a mobile device – or simply plug and play from a USB drive, thanks to the integrated media player. Connectivity is covered, with a versatile selection of inputs, and your preferred source settings are safeguarded by the one-time setup function. And when it comes to control, it's got everything you need for easy and efficient multi-display management right from your notebook or PC. Whichever options best suit your needs, your message will make its mark with bright, beautiful Full HD multimedia images and sound.

#### **Key Features:**

Full HD 1080p resolution, 350-nits brightness, 4000:1 contrast ratio

USB multimedia player for scheduled playback of videos, photos, and music

SuperClear® panel technology for stunning color performance and wide-angle viewing

HDMI, DVI, CVBS, YPbPr (YCbCr), VGA and RS232 for versatile connectivity

RS232 with IR pass-through for simplified management of display settings

#### **Designed for:**



Hospitality

Retail

Business

# 55" Narrow Bezel Full HD 1080p Commercial Large Format Display

**CDE5500-L**

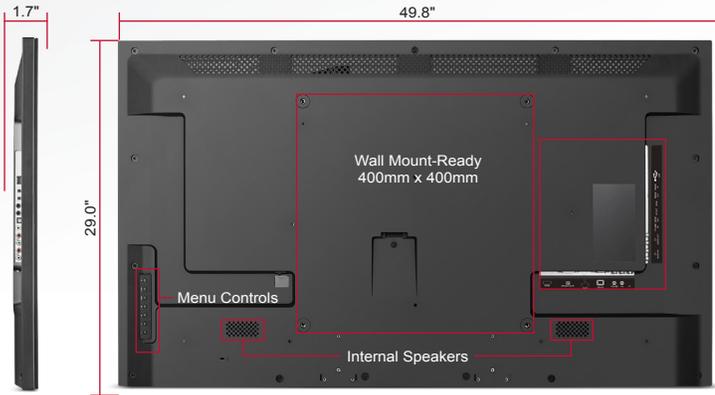

HDMI DVI LAN VGA YPbPr Audio In/Out  
PC Audio In SPDIF USB  
RS232 In/Out IR In/Out

## Specifications

<b>PANEL</b>	Type	Color TFT LCD Module with LED Backlight
	Display Area	47.6" horizontal x 26.8" vertical; 55.0" diagonal
	Optimum Resolution	1920 x 1080
	Contrast Ratio	1400:1 (typ)
	Viewing Angles	178° horizontal, 178° vertical
	Response Time	8ms
	Light Source	Long life, 30,000 hrs. (typ)
	Brightness	350 cd/m <sup>2</sup>
	Aspect Ratio	16:9
	Panel Surface	Anti-glare, hard coating 3H
<b>INPUT</b>	Video Input	HDMI, component, VGA, CVBS
	Control Input	RS232 (In/Out)
<b>AUDIO OUTPUT</b>	Speakers	Internal 7-watt (x2)
<b>INPUT SIGNAL</b>	TV/Video Comp	480i, 480p, 720p, 1080i, 1080p
<b>CONNECTOR</b>	Analog	15-pin mini D-sub (VGA), RCA Audio In/Out
	Digital	HDMI, DVI, YPbPr, CVBS, SPDIF, USB
	Power	3-pin plug
<b>CONTROLS</b>	Basic	Power, Mute, Input, Vol+, Vol-, Up, Down, Menu
	Picture	Picture style, Restore style, Backlight, Contrast, Brightness, Colour, Sharpness, Advanced, Game or Computer, Format and Edges
	Sound	Sound style, Restore style, Bass, Treble, Audio out, Advanced
	General Settings	Menu language, Monitor ID, Eco mode, Auto search, Clock, USB scheduling, Sleep timer, Auto switch off, Control settings, Factory settings
	Network Settings	View network settings, Network configuration, Static IP configuration, Digital Media Render, Network name (See user guide for complete OSD functionality)

<b>POWER</b>	Voltage	AC 100-240V (universal), 50-60Hz
	Consumption	109W (typ)
<b>OPERATING CONDITIONS</b>	Temperature	32-104°F (0-40°C)
	Humidity	20-80% (non-condensing)
<b>DIMENSIONS (W x H x D)</b>	Physical	49.8 x 29.0 x 1.7 in. / 1264.7 x 735.5 x 42.8 mm
	Packaging	54.1 x 34.3 x 5.9 in. / 1374 x 870 x 150 mm
<b>BEZEL DIMENSIONS</b>	Left/Right	24mm / 24mm
	Top/Bottom	24mm / 24mm
<b>WEIGHT</b>	Net	46.7 lbs / 21.2 kg
	Gross	56.4 lbs / 25.6 kg
<b>WALL MOUNT</b>	VESA Compatible®	400 x 400 mm
<b>REGULATIONS</b>		CE, CB, WEEE, C-tick, FCC, ICES003, UL/cUL, CU, ENERGY STAR® 6.0
<b>RECYCLE/DISPOSAL</b>		Please dispose of in accordance with local, state, or federal laws
<b>WARRANTY</b>		Three-year limited warranty on parts and labor

## Optional Accessories

Stand .....	STND-038
Wall Mount Kit .....	WMK-014

## What's in the box?

CDE5500-L display, power cable, VGA cable, RS232 cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (User Guide)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.