

65" Professional-grade LED Large Format Display

Large Full HD Screen for Hospitality and Pro/AV Environments

ViewSonic®
See the difference® 

CDE6500-L



The ViewSonic® CDE6500-L commercial LED display is great for multi-screen setups in hotels, restaurants, sports bars, or retail outlets that require automated control and customizable presets. With a USB-programmable hospitality setting, each display can have the same customized channel default, audio level, keypad lockout, RS232, HDMI CEC control features, and more. A built-in media player supports USB playback of photos and music. The CDE6500-L also features easy management and control of multiple-display installations with connected HD set-top boxes, media players, and Blu-ray™ players. Featuring Full HD 1080p resolution, SuperClear® technology for improved wide-angle viewing, and dual integrated 10W speakers, this 65" display delivers crystal-clear multimedia content.

Key Features:

Hospitality mode for custom set-up calibration

USB cloning

RS232 with IR pass-through for local control of set-top boxes and other connected devices

Built-in media player for USB playback of photos, and music

SuperClear image enhancement technology for wide-angle viewing

Versatile inputs include HDMI (x3), VGA, Composite, YPbPr, and SPDIF

Designed for:

Hospitality



Retail

Education

Business

65" Professional-grade LED Large Format Display

CDE6500-L

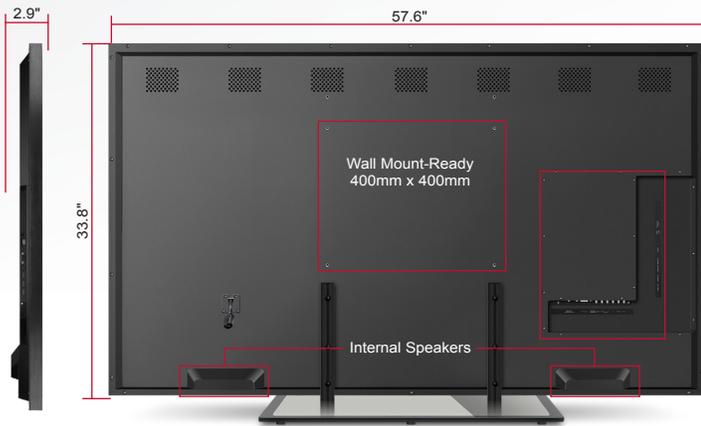

Specifications

PANEL	Type	65.0" color TFT LCD Module with LED Backlight
	Display Area	56.2" horizontal x 31.6" vertical; 64.5" diagonal
	Optimum Resolution	1920x1080
	Contrast Ratio	5000:1 (typ)
	Viewing Angles	176° horizontal, 176° vertical
	Response Time	6.5ms
	Light Source	Long life, 50,000 hrs. (typ)
	Brightness	350 cd/m ²
	Aspect Ratio	16:9
	Panel Surface	Anti-glare coating
INPUT	Video Input	HDMI, component, VGA, CVBS
	Video Output	VGA, CVBS
	Control Input	RS232, USB
AUDIO OUTPUT	Speakers	Internal 10-watt (x2)
INPUT SIGNAL	TV/Video Comp	480i, 480p, 720p, 1080i, 1080p
CONNECTOR	Analog	15-pin mini D-sub (VGA), RCA Audio In, headphone out
	Digital	HDMI (x3), DVI, YPbPr, CVBS, SPDIF, USB
	Power	Power cord
CONTROLS	Basic	Power, Mute, Input, Vol+, Vol-, Up, Down, Menu
	Picture	Picture Settings, Picture Mode, Screen Size, PC Settings, Color Temperature, Backlight, Advanced Picture Settings
	Sound	Sound settings, Analog Sound, Digital Sound, Digital Audio Output, Equalizer Setting
	Parental	Lock Parent Control, V-CHIP, Change Password, Keypad Lock, Source Lock, System Lock
	Setup	Closed Caption, Menu Language, Clock, OSD Transparency, OSD Timer
	Others	Blue Back, No Signal Power Off, No Operation Power Off, User Monitor, Audio Only, TV ID, All Reset (See user guide for complete OSD functionality)

POWER	Voltage Consumption	AC 100-240V (universal), 50-60Hz 160W (typ)
OPERATING CONDITIONS	Temperature	32-104°F (0-40°C)
	Humidity	20-80% (non-condensing)
DIMENSIONS (W x H x D)	Physical (w/ Stand)	57.6 x 37.1 x 11.0 in. / 1462.8 x 942.4 x 280 mm
	Physical (w/o Stand)	57.6 x 33.8 x 2.9 in. / 1462.8 x 857.1 x 74.3 mm
BEZEL DIMENSIONS	Left/Right	15mm / 15mm
	Top/Bottom	15mm / 34.5mm
WEIGHT	Net (w/ Stand)	92.3 lbs / 42.0 kg
	Net (w/o Stand)	82.0 lbs / 37.2 kg
	Gross	125.6 lbs / 57.0 kg
WALL MOUNT	VESA®	400 x 400 mm
REGULATIONS		FCC, CE, CB, UL (by request), RoHS, Mexico-UL CoC
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
WARRANTY		Three-year limited warranty on parts and labor
OPTIONAL ACCESSORIES	Wall Mount Kit	WMK-014

What's in the box?

CDE6500-L display, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (User Guide)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.