



Built-in Dual Core ARM CPU and Pre-installed Annotation Software

CDE7060T



For interactive learning in the classroom, or brainstorming in the boardroom, the ViewSonic® CDE7060T is the ideal interactive display solution to increase engagement and collaboration. With astonishing 10-point simultaneous touch capabilities and pre-installed annotation software, this 70" (69.5" viewable) large format display lets multiple users write or draw on the screen with their fingers and styluses. An embedded ARM dual-core processor and Linux OS provide lightning-fast computing and smooth touch capabilities, ensuring that students and co-workers alike enjoy a responsive screen with each tap, pinch, and swipe. An optional slot-in PC provides additional computing power, while optional ViewBoard™ software delivers more robust annotation options that make presentations in the classroom or office even more productive and interactive.

Key Features:

- 10-point multi-touch interactive screen
- Built-in ARM Dual Core CPU with 8GB storage
- Pre-installed annotation software
- Optional slot-in PC
- Optional interactive education software

Designed for:


- Business
- Education

70" (69.5" viewable) 10-Point Touch Interactive Commercial Display



CDE7060T



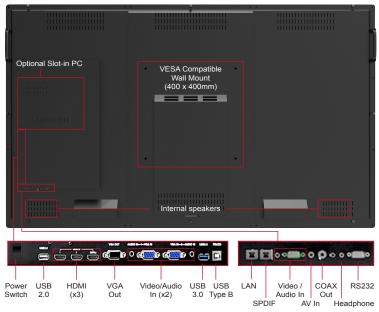

Specifications

PANEL	Type Display Area Optimum Resolution Contrast Ratio Viewing Angles Response Time Light Source Brightness Aspect Ratio Panel Surface	70" color TFT LCD Module with LED Backlight 60.6" horizontal x 34.1" vertical; 69.5" diagonal 1920x1080 4000:1 (typ) 176° horizontal, 176° vertical 6ms Long life, 50,000 hrs. (typ) 350 cd/m² 16:9 Anti-glare, hard coating 7H scratch resistant
INPUT	Video Input Video Output Control Input	HDMI, component, VGA, CVBS VGA RS232
AUDIO OUTPUT	Speakers	Internal 10-watt (x2)
EMBEDDED PLAYER	Android Version CPU Memory Storage Networking	4.2.1 ARM Cortex A9 Dual Core CPU 1.5 GB 8GB Integrated 10/100/1000M Adaptation
INPUT SIGNAL	TV/Video Comp	480i, 480p, 720p, 1080i, 1080p
CONNECTOR	Analog Digital Power	15-pin mini D-sub (VGA x3), PC Audio In (x3), headphone out 1080p HDMI (x3), CVBS, SPDIF, USB (x4), RS232, LAN 3-pin plug
OSE	Panel Input Light Volume VGA Picture	Power, Home, Return, Setting, Vol-, Vol+ PC, Android, AV, VGA1, VGA2, VGA3, HDMI1, HDMI2, HDMI3 1~100 0~100 H Position, V Position, Phase, Clock, Zoom, Auto Adjust, Writing Mode Brightness, Contrast, Hue, Sharpness, Color Temp, Zoom, Writing Mode

Embedded Player	Setting	Ethernet checking, Sound, Display, Apps, Language &
	· ·	input, Date & time, About device
	Annotation	Annotation menu, Return, Main, Pen, ViewBoard Lite, Open file, Screenshot, close menu
	Interface	ViewBoard Lite, Finder, Browser PIP, Setting, Apps
Multimedia	Image	Close, Zoom in, Zoom out, previous, Play/Pause, Next, Counterclockwise, Clockwise, setting Close, Previous, Play/Pause, Next, Playlist, Loop, Random, Single
	Audio	
	Video	Close, Previous, Fast backwards, Play/Pause, Fast
		forward, Next, Playlist (See user guide for complete OSD functionality)
POWER	Voltage Consumption	AC 100-240V (universal), 50-60Hz 350W (typ)
OPERATING CONDITIONS	Temperature Humidity	32-104°F (0–40°C) 10-90% (non-condensing)
DIMENSIONS (W x H x D)	Physical Packaging	65.0 x 39.3 x 3.9 in. / 1650 x 999 x 98 mm 71.7 x 45.1 x 11.0in. / 1820 x 1145 x 280 mm
WEIGHT	Net Gross	156.5 lbs / 71 kg 191.8 lbs / 87 kg
WALL MOUNT	VESA®	400 x 400 mm
REGULATIONS		CE, EEI, FCC, US-NRTL, CCC, CEL
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
		Three-year limited warranty on parts and labor

Optional Accessories

i5 Slot-in PC	NMP-710
Trolley Cart	LB-STND-003
Wall Mount	WMK-047
USB Wireless Adapter	WPD-100

What's in the box?

CDE7060T display, power cable, VGA cable, audio cable, USB cable, remote control with batteries, stylus (x3), Wall Mount Spacer, RS232 adapter, ViewSonic Wizard CD (User Guide and ViewBoard software)

