

50" ePoster Digital Kiosk

Free-standing Display Solution for Customized Messaging

EP5012-L



The ViewSonic® EP5012-L is a 50" all-in-one ePoster digital kiosk with a sleek, free-standing design. Great for grabbing attention in busy, high-traffic areas, the EP5012-L features a scratch-proof tempered glass faceplate for added durability. With embedded Linux, the EP5012-L delivers easy application integration and enables users to deliver more customized messaging to their audience. Featuring Full HD resolution, SuperClear® image enhancement technology with wide viewing angles, and dual integrated stereo speakers, the EP5012-L delivers customized multimedia messaging with vivid clarity.

Key Features:


- Easy to move all-in-one display solution
- Embedded Linux enables implementation of customized messaging applications
- 8GB internal memory and integrated media player for playback of photos and videos
- Bundled ePoster Manager Express software for easy content loading and scheduling
- Efficient, user-friendly content scheduling interface
- HDMI, D-sub, USB (x2), and LAN connections provide network connectivity

Designed for:

- Retail advertising
- Wayfinding
- Hospitality
- Education

50" ePoster Digital Kiosk

EP5012-L

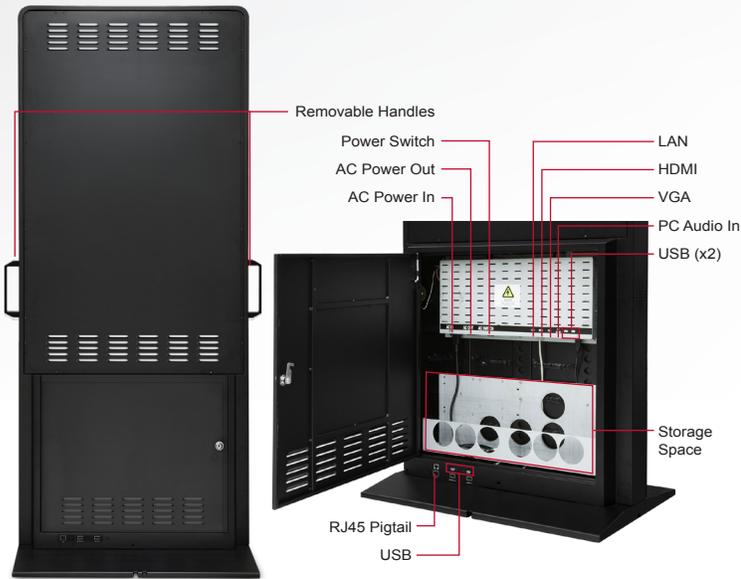

Specifications

PANEL	Type	Color TFT active matrix LCD w/ WLED backlight
	Display Area	24.2" horizontal x 43.1" vertical; 50" diagonal
	Optimum Resolution	1920x1080, 600mm dot pitch
	Brightness	350 cd/m ² (typ)
	Contrast Ratio	5000:1 (typ)
	Viewing Angles	176° horizontal, 176° vertical
	Response Time	6.5ms
	Backlight	White-light LED
	Backlight Life	50,000 hrs. (typ)
	Light Source	30,000 hrs. (min)
	Aspect Ratio	16:9
	Panel Surface	Anti-glare, hard coating (3H)
INTERNAL	Storage	8GB
	File Support	Video: MPEG 1/4, AVC, VC-1, RM Photo: JPEG, GIF, BMP, PNG Audio: WMA, MP3, M4A (AA CC)
CONNECTOR	Analog	VGA, 15-pin mini D-sub (x1)
	Digital	HDMI (x1)
	Audio In	3.5mm mini jack (x1)
	USB	Type B (x2)
	LAN	RJ45
	Power	3-pin plug
AUDIO OUTPUT	Speakers	Internal 6-watt (x2)
POWER	Voltage	AC 100-240V (universal), 50+60Hz
	Consumption	97.6W (typ)
CONTROLS (OSD)	System Settings	Language, Screen Mode, Screen Resolution, Clock Display, USB, Scrolling Text, Sync Settings, Reset
	System Control	Work Mode, Storage Priority
	Network Setting	Server Settings, Get IP Type, Machine ID, MAC Address
	Date and Time	Date, Time, Startup Sync Time Setting, Daylight Saving Time, Time Zone, Sync Time Now
	On/Off Timer	Timer Mode, Control Mode
	Special Settings	Volume, Source
	Onboard Storage	Status
	Status	Reformat

OPERATING CONDITIONS	Temperature	32-122°F (0-50°C)
	Humidity	20-90% (non-condensing)
DIMENSIONS (W x H x D)	Physical	29.7 x 72.8 x 17.7 in. / 755 x 1850 x 450 mm
	Packaging	35.4 x 79.5 x 22.5 in. / 897.5 x 2018 x 572 mm
WEIGHT	Net	188.7 lbs / 85.6 kg
	Gross	213.0 lbs / 96.6 kg
ACCESSORY MOUNT		100 x 100 / 75 x 75 mm
REGULATIONS		FCC, CE
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state or federal laws.
WARRANTY		One-year limited warranty

What's in the box?

EP5012-L ePoster Digital Kiosk, Power cable, Y power cable, Remote control with batteries, Key (x1) to lock door, Hexagon wrench (x1) to remove handles, Black labels to cover holes after removing handles, Quick Start Guide, ViewSonic Wizard CD (User Guide and ePoster Manager Express Plus software)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

www.viewsonic.com