

# 24" (23.6" viewable) Full HD Hospitality LED Display

High-Definition Television for Hospitality Environments

**VT2406-L**



The ViewSonic® VT2406-L is a premium 24" (23.6" viewable) LED monitor with an HDTV-tuner for HDTV programming. It features a glossy-finish, slim-bezel design, as well as 1920x1080 native resolution, very fast response times and a high contrast ratio for superior image and color performance. Versatile connectivity options include HDMI, PC, and traditional YPbPr and CVBS inputs. A RS232 control port with IR pass-through provides automated control for hospitality and commercial installations. Plus, HDMI CEC pass-through support provides one-touch-play and other control features for multiple connected devices. Users can select favorite channel and parental control settings for all their customized TV channels and hospitality-mode programming. It includes a USB cloning function for music and photo playback and easier content duplication. Dual integrated 5W stereo speakers and SPDIF functionality also make this display solution the complete multimedia entertainment package for hotels, restaurants, bars and other venues.

### **Full HD 1920x1080 Display Resolution**

The VT2406-L features Full HD 1920x1080 resolution to deliver superior pixel-by-pixel performance for a more realistic viewing experience. With Full HD resolution, experience greater image clarity and detail that bring high-definition TV programs, HD movies, and other multimedia content to life.

### **Hospitality Mode for Automated Multi-screen Control**

The VT2406-L is great for multi-screen setups in hotels, restaurants, sports bars, or retail outlets that require automated control and customizable presets. With a programmable hospitality setting, each television can have the same customized channel default, audio level, front-panel lockout, and auto power-up settings.

### **USB Multimedia Playback & Cloning**

With the handy PC-less USB playback feature, photos and music can be immediately played and shared by plugging a USB drive into the display. In addition, the VT2406-L includes USB cloning for easy duplication in multi-screen environments.

### **RS232 and IR Pass-through for Multi-device Control**

The VT2406-L features a RS232 control port with IR pass-through to provide automated control for hospitality and commercial display installations. IR pass-through offers local control for set-top boxes or other connected devices, directly from the display's remote controller.

### **HDMI CEC Delivers More Viewing Possibilities**

With HDMI CEC functionality, remote controller signals can be transmitted via HDMI cable to connected HDMI devices. This enables out-of-sight DVD players, sound systems, and other devices to be directly controlled with the display's remote controller for a wider range of viewing possibilities.

# 24" (23.6" viewable) Full HD Hospitality LED Display

**VT2406-L**




## Versatile Input Connectivity

VGA, YPbPr, and USB inputs provide extreme flexibility, while 3 HDMI ports allow connection to HD set-top-boxes, media players, and Blu-ray players.

## Applications

- Indoor commercial environments
- Retail digital signage – small to mid-size business
- Hotels
- Sports bar and restaurant entertainment displays

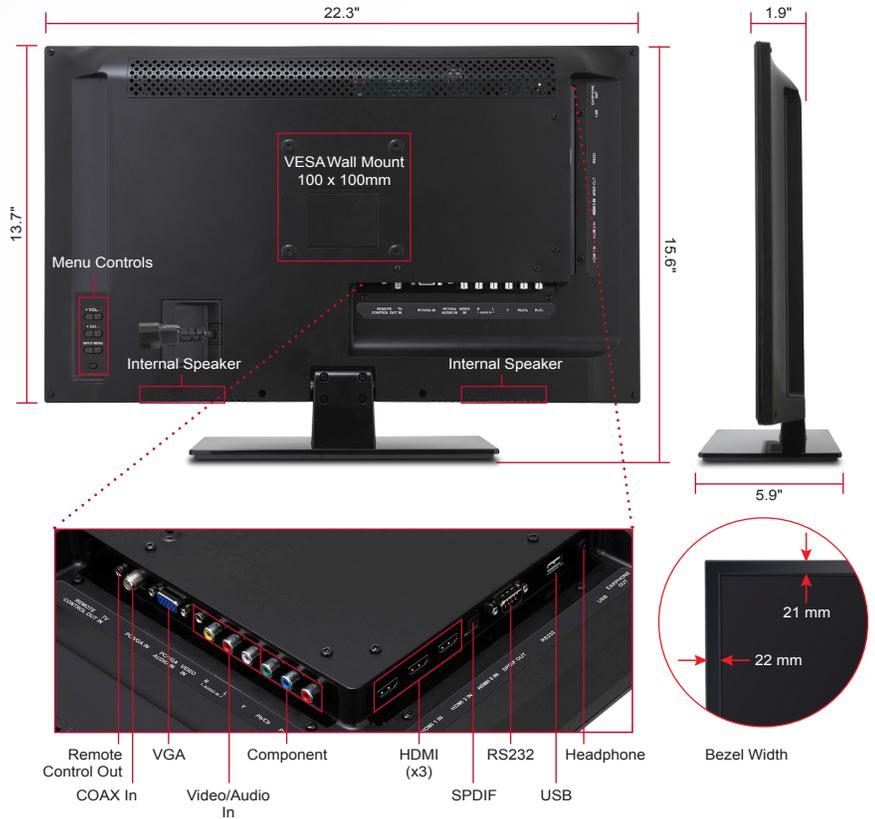

## Specifications

<b>PANEL</b>	Type	23.6" color TFT active matrix, wide LCD with WLED Backlight
	Display Area	20.5" horizontal x 11.5" vertical; 23.6" diagonal
	Optimum Resolution	1920 x 1080
	Contrast Ratio	1000:1 (typ)
	Viewing Angles	170° horizontal, 160° vertical
	Response Time	5ms
	Light Source	Long life, 50,000 hrs. (typ)
	Brightness	250 cd/m <sup>2</sup> (typ)
	Aspect Ratio	16:9
	Panel Surface	Anti-glare, hard coating (3H)
<b>INPUT</b>	Video Input	HDMI, component, VGA, CVBS, RF (TV)
	Control Input	RS232
	USB 2.0	JPEG, MP3
<b>AUDIO OUTPUT</b>	Speakers	Internal 5-watt (x2)
<b>INPUT SIGNAL</b>	TV/Video Comp.	480i, 480p, 720p, 1080i, 1080p
<b>CONNECTOR</b>	Analog	15-pin mini D-sub (VGA), RCA Audio In, headphone out
	Digital	HDMI (x3), YPbPr, CVBS, SPDIF, USB, RF (TV) Coax
	Power	3-pin plug
<b>CONTROLS</b>	Picture	Picture Settings Picture Mode, Screen Size, PC Settings, Color Temperature, Backlight, Advanced Picture Settings
	Sound	Sound Setting, Analog Sound, Digital Sound, Digital Audio Output, Equalizer Setting
	Channel	Channel List, Favorite List, Channel Settings, Signal Type, Auto Channel Search, DTV signal
	Parental	Lock Parent Control, V-CHIP, Change Password, Keypad Lock, Source Lock, System Lock
	Setup	Closed Caption, Menu Language, Clock, OSD Transparency, OSD Timer
	Others	Blue Back, No Signal Power Off, No Operation Power Off, User Moniro, Audio Only, TV ID (See user guide for full OSD functionality)

<b>POWER</b>	Voltage	AC 100–240V (universal), 50–60Hz
	Consumption	30W (max)
<b>OPERATING CONDITIONS</b>	Temperature	32–104°F (0–40°C)
	Humidity	20–80% (non-condensing)
<b>DIMENSIONS (W x H x D)</b>	Physical With Stand	22.3 x 15.6 x 5.9 in. / 566.6 x 394.8 x 149.2 mm
	Physical Without Stand	22.3 x 13.7 x 1.9 in. / 566.6 x 346.5 x 48.3 mm
	Packaging	25.0 x 18.5 x 4.9 in. / 637 x 469 x 124 mm
<b>BEZEL DIMENSIONS</b>	Left/Right	22mm / 22mm
	Top/Bottom	21mm / 31.5mm
<b>WEIGHT</b>	Net With Stand	9.1 lb. / 4.1 kg
	Net Without Stand	8.5 lb. / 3.9 kg
	Gross	11.9 lb. / 5.4 kg
<b>WALL MOUNT</b>	VESA®	100mm x 100mm
<b>REGULATIONS</b>		FCC, UL, RoHS, ENERGY STAR®, NOM
<b>RECYCLE/DISPOSAL</b>		Please dispose of in accordance with local, state or federal laws.
<b>WARRANTY</b>		One-year limited warranty on parts, labor and backlight

## What's in the box?

VT2406-L display, power cord, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (with User Guide)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.