

42" Full HD Commercial Display

Easy-to-Manage Entertainment for Hospitality and More

VT4200-L



Everything you need in a display for an easy-to-manage multi-screen hospitality information and entertainment system – the 42" ViewSonic® VT4200-L has got it all! Automated remote control, remote IR pass through, and customizable presets? It's got them! HDMI CEC for remote control of out-of-sight DVD players, sound systems, and other devices? Yep. Built in HDTV-tuner supports off-air broadcast reception and USB for quick, easy music and photo playback? You bet! Of course, outstanding multimedia image quality and sound are a given with Full HD, super-fast response time, high contrast ratio and stereo speakers. All wrapped up in a sleek, slim bezel design with premium-look glossy finish – it's a complete multimedia entertainment package for hotels, restaurants, bars and more.

Key Features:

Hospitality Mode for Automated Multi-screen Control

USB Photo & Music Playback & Calibration Cloning

RS232 and IR Pass-through for Multi-device Control

Versatile connectivity includes internal speaker, VGA, YPbPr, and USB inputs plus 3 HDMI® ports

Designed for:


Hospitality

Public display

Education

42" Full HD Commercial Display

VT4200-L

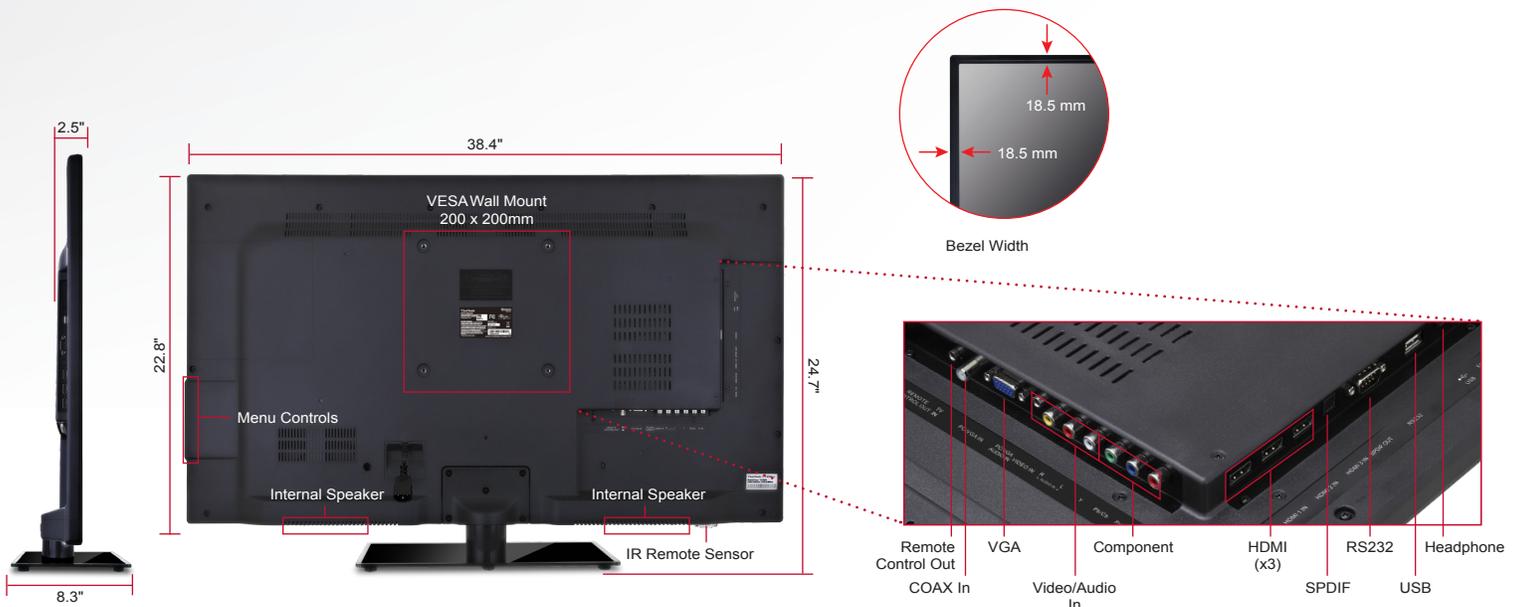

Specifications

PANEL	Type	42.0" color TFT active matrix, wide LCD with WLED Backlight	POWER	Voltage	AC 100–240V (universal), 50–60Hz	
	Display Area	36.6" horizontal x 20.6" vertical; 42.0" diagonal		Consumption	59W (typ)	
	Optimum Resolution	1920 x 1080		OPERATING CONDITIONS	Temperature	32–104°F (0–40°C)
	Contrast Ratio	3000:1 (typ)			Humidity	20–80% (non-condensing)
	Viewing Angles	170° horizontal, 170° vertical		DIMENSIONS (W x H x D)	Physical With Stand	38.4 x 24.7 x 8.3 in. / 974.2 x 626.3 x 210 mm
	Response Time	6.5ms			Physical Without Stand	38.4 x 22.3 x 2.5 in. / 974.2 x 567 x 64.4 mm
	Light Source	Long life, 30,000 hrs. (typ)			Packaging	47.3 x 27.6 x 5.6 in. / 1200 x 700 x 143 mm
	Brightness	350 cd/m ² (typ)		BEZEL DIMENSIONS	Left/Right	18.5mm / 18.5mm
	Aspect Ratio	16:9			Top/Bottom	18.5mm / 18.5mm
	Panel Surface	Anti-glare, hard coating (3H)		WEIGHT	Net With Stand	29.3 lb. / 13.3 kg
INPUT	Video Input	HDMI, component, VGA, CVBS	Net Without Stand		26.2 lb. / 11.9 kg	
	Control Input/Output	RF, COAX/QAM/ATSC TV, RS232, USB 2.0	Gross	35.5 lb. / 14.7 kg		
AUDIO OUTPUT	Speakers	Internal 10-watt (x2), SPDIF optical	WALL MOUNT	VESA®	200mm x 200mm	
	TV/Video Comp.	480i, 480p, 720p, 1080i, 1080p		REGULATIONS	FCC, UL, RoHS, ENERGY STAR 6.0, Mexico-UL-CoC, Mexico Energy	
CONNECTOR	Analog	15-pin mini D-sub (VGA), RCA Audio In, headphone out	RECYCLE/DISPOSAL		Please dispose of in accordance with local, state or federal laws.	
	Digital	HDMI (x3), YPbPr, CVBS, SPDIF, USB		WARRANTY	One-year limited warranty on parts, labor and backlight	
	Power	3-pin plug				
CONTROLS	Panel	Menu, VOL +/-, Down/Up, Input, Power				
	Picture	Picture Mode, Screen Size, PC Settings, Color Temperature, Backlight, Advanced Picture Settings, Noise Reduction				
	Sound	Sound Setting, Analog Sound, Digital Sound, Digital Audio Output, Equalizer Setting,				
	Chanel	Chanel List, Favorite List, Chanel Settings, Signal Type, Auto Channel Search, DTV signal				
	Parental	Lock Parent Control, V-Chip, Change Password, Keypad Lock, Source Lock, System Lock				
	Setup	Closed Caption, Menu Language, Clock, OSD Transparency, Time Zone, OSD Timer				
Others	Blue Back, No Signal Power Off, No Operation Power Off, All Reset, Audio Only, TV ID					

What's in the box?

VT4200-L display, power cord, remote control with batteries, base stand & screws, Quick Start Guide, ViewSonic Wizard CD (with User Guide)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.